

Datasheet - BN 20-10Z

Magnetic reed switch / BN 20



Preferred typ



- Non-contact principle
- With pre-wired cable
- 1 Reed kontakts
- Long life
- 104 mm x 52 mm x 47 mm
- Aluminium enlosure
- Actuating distance up to 50 mm depending on actuating magnet and version
- Screw connection
- Highly resistant to vibration
- Available for actuation from front or side

(Minor differences between the printed image and the original product may exist!)


Ordering details

| | |
|--------------------------|---------------|
| Product type description | BN 20-10Z |
| Article number | 101172882 |
| EAN code | 4030661301761 |
| eCl@ss | 27-27-01-04 |

Approval

| | |
|----------|---|
| Approval | - |
|----------|---|

Global Properties

| | |
|--|--|
| Product name | BN 20 |
| Standards | - |
| Compliance with the Directives (Y/N)  | Yes |
| suitable for elevators (Y/N) | No |
| Active principle | Magnetic drive |
| Materials | |
| - Material of the housings | Aluminium |
| - Material of the active surface | Metal film |
| Housing construction form | rectangular |
| Weight | 285 g |
| Recommended actuator | 2 x BP 10, 2 x BP 15/2, BP 20, BP 31, BP 11, BP 12, BP 21 N, BE 20 |

Mechanical data

| | |
|---------------------------------|---|
| Design of electrical connection | Screw connection |
| Mechanical life | 1.000.000.000 operations |
| Electrical lifetime | 1.000.000 ... 1.000.000.000 operations |
| Switching frequency | max. 300/s |
| Actuating planes | Actuation from side |
| Active area | lateral |
| Switch distance S_n | 12 mm ... 45 mm 2 x BP 10 = 12 mm 2 x BP 15/2 = 12 mm BP 20 = 15 mm BP 31 = 15 mm BP 11 = 15 mm BP 12 = 25 mm BP 21N = 20 ... 45 mm BE 20 = 15 mm |
| - notice | Actuating distance up to 45 mm depending on actuating magnet and version |
| Type of actuation | Magnet |
| resistance to shock | - |
| resistant to vibration | 50 g, on sine wave oscillation |
| Bounce duration | 0,3 ms ... 0,6 ms |
| Latching (Y/N) | No |
| bias magnet (Y/N) | Yes |
| Actuating speed | max. 18 m/s |
| Switching point accuracy | ± 0,25 mm |

Ambient conditions

| | |
|----------------------------------|--------|
| Ambient temperature | |
| - Min. environmental temperature | -25 °C |
| - Max. environmental temperature | +90 °C |
| Protection class | IP67 |

Electrical data

| | |
|---------------------------|----------------------------|
| Design of control element | Normally open contact (NO) |
| Number of shutters | 1 piece |
| Number of openers | 0 piece |
| Switching time - Close | 0,3 ms ... 1.5 ms |
| Switching time - Open | - |
| Voltage type | VAC |
| Dielectric strength | > 600 VAC (50 Hz) |
| Switching voltage | max. 250 VAC |
| Switching current | max. 3 A |
| Switching capacity | max. 120 VA / W |

Outputs

| | |
|--------------------------|---------------|
| Design of control output | Reed contacts |
|--------------------------|---------------|

LED switching conditions display

| | |
|--|----|
| LED switching conditions display (Y/N) | No |
|--|----|

ATEX

| | |
|---|------|
| Explosion protection categories for gases | None |
| Explosion protected category for dusts | None |

Dimensions

| | |
|--------------------------|--------|
| Dimensions of the sensor | |
| - Width of sensor | 104 mm |
| - Height of sensor | 52 mm |
| - Length of sensor | 47 mm |


notice

The opening and closing functions depend on the direction of actuation, the actuating magnets and the polarity of the actuating magnets. When the switches and actuators come together, the colours must coincide: Red (S) to red (S) and green (N) to green (N).






Included in delivery

Actuators must be ordered separately.

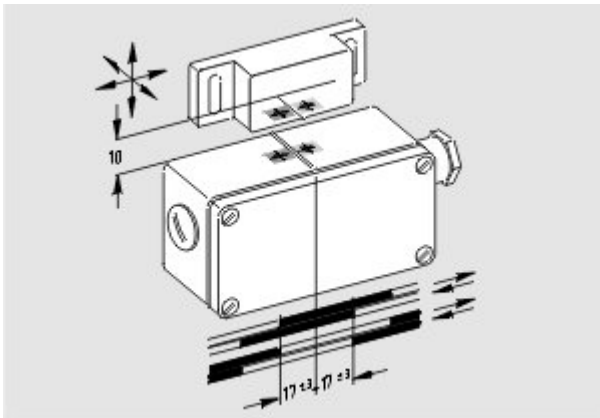Diagram



Note Diagram

-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact

Documents

Declaration of conformity (en) 118 kB, 26.02.2014

Code: __bn_p01_en

Declaration of conformity (de) 188 kB, 10.07.2012

Code: __bn_p01

notice - Switch distance (de) 36 kB, 07.08.2009

Code: s_bns01

notice - Switch distance (nl) 39 kB, 07.08.2009

Code: s_bnbsp04

notice - Switch distance (fr) 41 kB, 07.08.2009

Code: s_bnbsp03

notice - Switch distance (pt) 39 kB, 07.08.2009

Code: s_bnbsp10


notice - Switch distance (it) 40 kB, 07.08.2009

Code: s_bnbsp05


notice - Switch distance (es) 38 kB, 07.08.2009

Code: s_bnbsp09

Images

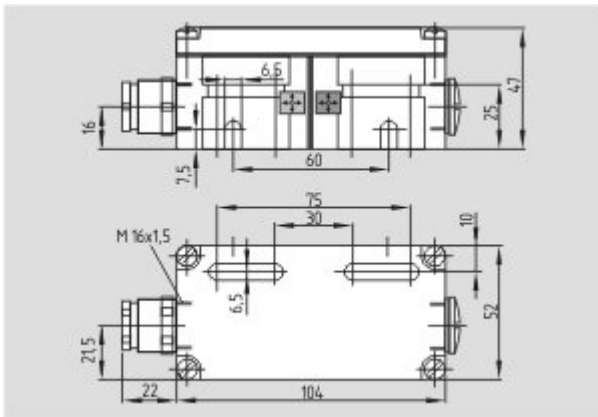


Dimensional drawing (basic component)

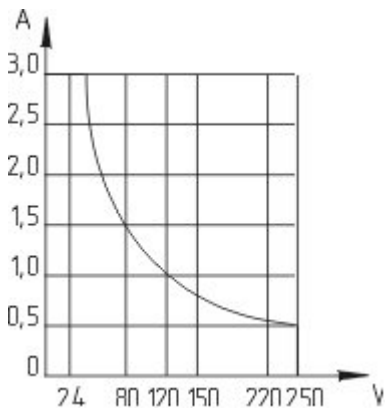

Characteristic curve

System components

Actuator




101057534 - BP 21 S

- Al-metal housing
- S-pole marked red
- Suitable for mounting on ferrous material




101057536 - BP 21 N

- Al-metal housing
- N-pole marked green
- Suitable for mounting on ferrous material



101059921 - BP 21

- Al-metal housing
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material




101059917 - BP 12 N

- Al-metal housing
- N-pole marked green
- Suitable for mounting on ferrous material




101059916 - BP 12

- Al-metal housing
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material




101057533 - BP 11 S

- Al-metal housing
- S-pole marked red
- Suitable for mounting on ferrous material



101059923 - BP 11 N

- Al-metal housing
- N-pole marked green
- Suitable for mounting on ferrous material





101059922 - BP 11

- Al-metal housing
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material


101057521 - BP 31 S

- thermoplastic enclosure
- S-pole marked red
- Suitable for mounting on ferrous material with a distance of 20 mm




101057520 - BP 31 N

- thermoplastic enclosure
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 20 mm




101057530 - BP 31

- thermoplastic enclosure
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 20 mm




101057541 - BP 20 S

- Al-metal housing
- S-pole marked red
- Suitable for mounting on ferrous material with a distance of 20 mm



101057538 - BP 20 N

- Al-metal housing
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 20 mm



101057549 - BP 20

- Al-metal housing
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 20 mm



101057553 - BP 34

- thermoplastic enclosure
- S-pole marked red
- N-pole marked green
- Suitable for mounting on ferrous material with a distance of 25 mm



101060165 - BP 15/2

- Unenclosed
- Polarity stamped in
- Suitable for mounting on ferrous material with a distance of 18 mm



101060163 - BP 15

- thermoplastic enclosure
- N-pole marked green
- S-pole marked red
- Suitable for mounting on ferrous material with a distance of 18 mm



101057531 - BP 10

- Unenclosed
- Colour coding of poles by labels

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 19.01.2016 - 02:39:02h Kasbase 3.2.1.F.64I