


# LITHIUM-MANGANESE DIOXIDE BATTERY



Size: DURPC2016

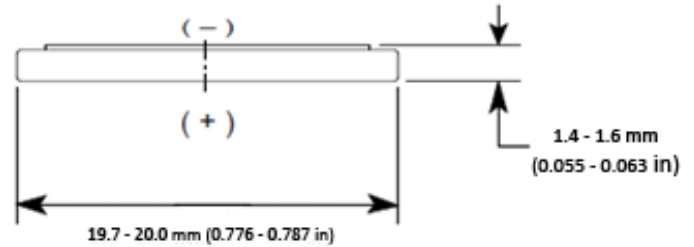

Dimensions shown are IEC standards

## KEY FEATURES

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Child-Safe Markings & Retail Packaging
- Low self-discharge with long operating life (<1% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
  - Safety: IEC 60086-4
  - Transport: UN 38.3
  - RoHS and REACH compliance
  - Quality: ISO 9001, Duracell World Class Continuous Program

## ELECTRICAL CHARACTERISTICS

Nominal capacity (15 kΩ Cont., 2.0 V cut-off)	110 mAh
Nominal voltage (at + 20 °C)	3.0 V
Standard Continuous Discharge Current	0.2 mA
Maximum Continuous Discharge Current	3 mA
Maximum Pulse Discharge Current at 1 sec	10 mA
Nominal Energy	315 mWh
AC Impedance @ 1kHz	11Ω

## PHYSICAL CHARACTERISTICS

Typical weight	1.74g (.061 oz.)
Li metal content	approx. 0.025 g

## OPERATING & STORAGE CONDITIONS

Operating temperature range	-20°C to 60°C (-4°F to 140°F)
Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Hamer for the latest information.



130 Bush Road  
Albany, 0632  
Telephone: 0800 239 239  
[www.hamer.co.nz](http://www.hamer.co.nz)

## TYPICAL APPLICATIONS

- Medical devices
- Security devices
- Fitness devices
- Watches
- Wireless sensors
- Toys
- Key-Fobs
- Bluetooth Trackers

## 60086-4 © IEC:2007 Edition 3.0

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

## WARNING! KEEP BATTERIES AWAY FROM CHILDREN!

- Always keep your batteries away from children to prevent swallowing.
- If ingestion does occur, however, be aware that initial symptoms may be similar to other childhood illnesses such as coughing, drooling and discomfort.
- Battery ingestion hotline (860-498-8666)

## WARNING

- Fire, explosion and burn hazard
- Do not recharge, short circuit, crush, disassemble, expose to heat above 100 °C (212 °F), incinerate, or expose contents to water



130 Bush Road  
Albany, 0632  
Telephone: 0800 239 239  
[www.hamer.co.nz](http://www.hamer.co.nz)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Hamer for the latest information.