


LITHIUM-MANGANESE DIOXIDE BATTERY



Size: DURPCCR2

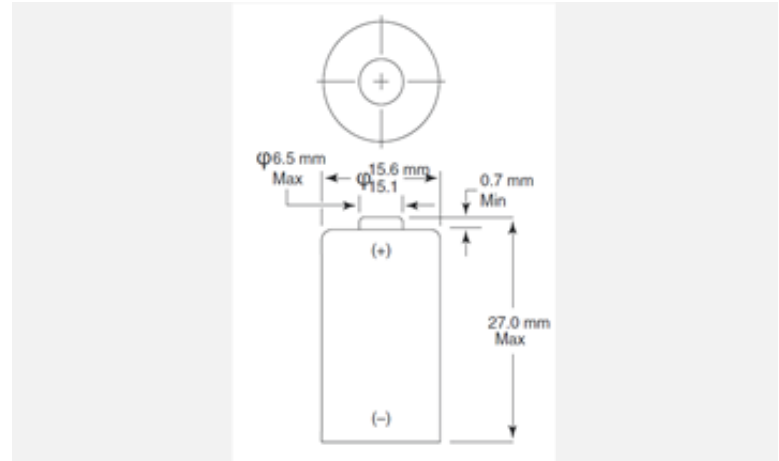

Dimensions shown are IEC standards

KEY FEATURES

- High voltage response, stable during most of the lifetime of the application
- Reliable Performance
- Low self-discharge with long operating life (<1% after 1 year of storage at + 20 °C)
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environment standards:
 - Safety: IEC 60086-4
 - Transport: UN 38.3
 - RoHS and REACH compliance
 - Quality: ISO 9001, Duracell World Class Continuous Program

ELECTRICAL CHARACTERISTICS

Nominal capacity (100 Ω Cont., 2V cut-off)	920 mAh
Typical Voltage (at + 20 °C)	3.2-3.3 V
Standard Continuous Discharge Current	20 mA
Maximum Continuous Discharge Current	60 mA
Maximum Abnormal Charge Current	20 mA
Nominal Energy	2.55 Wh
AC Impedance @ 1kHz	300 mΩ

PHYSICAL CHARACTERISTICS

Typical weight	11 g (0.39 oz.)
Li metal content	approx. 0.30g

OPERATING & STORAGE CONDITIONS

Operating temperature range	-20°C to 75°C (-4°F to 167°F)
Recommended Storage (storage area should be clean, cool, dry and ventilated)	5°C to 30°C (41°F to 86° F)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Hamer for the latest information.




130 Bush Road
Albany, 0632
Telephone: 0800 239 239
www.hamer.co.nz



TYPICAL APPLICATIONS

- Cameras
- Security devices (sensors)
- Smoke Detectors
- Wireless Sensors
- Remote Controls
- High Intensity Flashlights
- Laser Sights

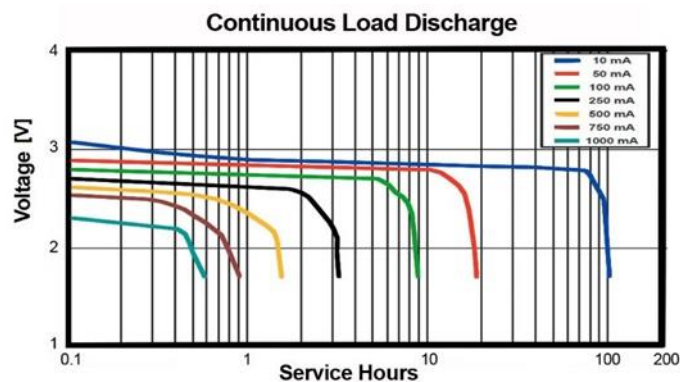

60086-4 © IEC:2007 Edition 3.0

Test	Test designation	Observation
A	Altitude	Pass
B	Thermal cycling	Pass
C	Vibration	Pass
D	Shock	Pass
E	External short circuit	Pass
F	Impact	Pass
G	Crush	Pass
H	Forced discharge	Pass
I	Abnormal charging	Pass
J	Free fall	Pass
K	Thermal Abuse	Pass

WARNING

- Fire, explosion and burn hazard
- Do not recharge, short circuit, crush, disassemble, expose to heat above 100 °C (212 °F), incinerate, or expose contents to water



130 Bush Road
Albany, 0632
Telephone: 0800 239 239
www.hamer.co.nz

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Hamer for the latest information.