


This drawing and its contents are confidential and exclusive property of PFISTERER (PTY) LTD. No publications, copies or distribution may be made without written consent by PFISTERER (PTY) LTD.

400A FSD 25-185mm²
Single Terminal Block

Section View

Double Out

400A FSD 25-185mm²
Double Terminal Block

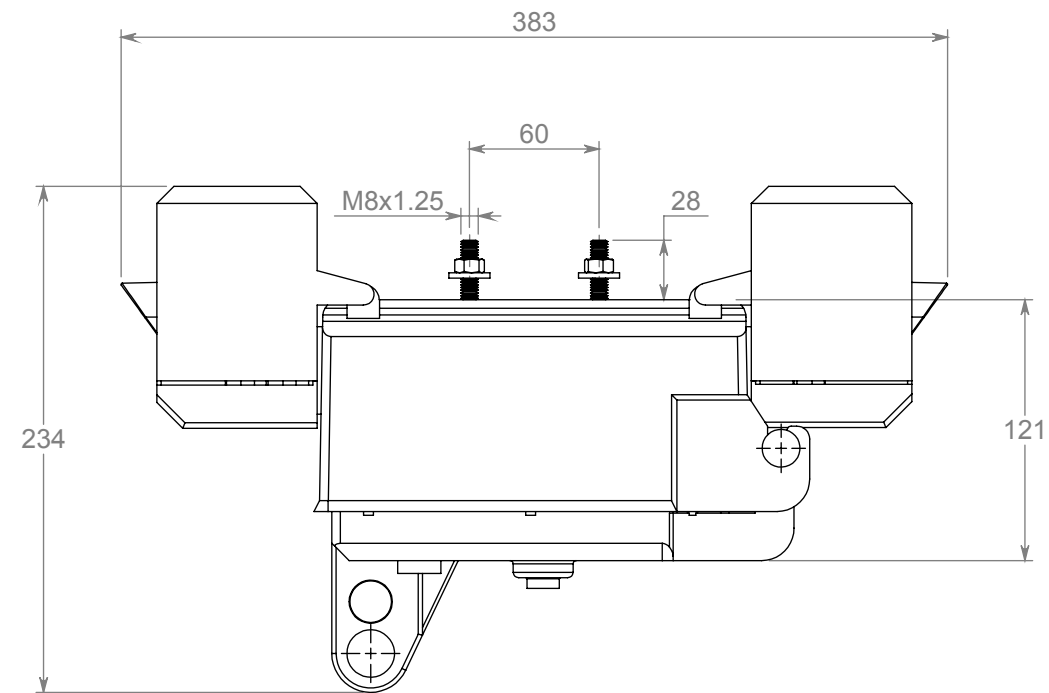

Single In

Indicator Light (Fuse Blown)

Isometric View

Technical Data:

Rated insulation voltage, V	=	1000 V
Rated operation current, A	=	400 A per phase
Rated short circuit making capacity, kA	=	16 kA
Rated short circuit withstand current, kA	=	16 kA
Protection class	=	IP 23
Maximum conductor size	=	185 mm ²
Minimum conductor size	=	25 mm ²

Manufactured in acc to: IEC 947-3

Protector class: IP23

Utilization category: AC 22B

Description	Unspecified Tolerances	Weight		Substitute for	
		kg			
Fuse Switch Disconnecter 400A SIDO 25-185mm ²	0, ±1	Drawn By	03/03/15	REN	
	0,0 ±0.25	Checked By	03/03/15	REN	
	0,00 ±0.1	Approved By	03/03/15	RON	
	Angles ±1°	Material		Revision	003
PFISTERER (PTY) LTD		Scale	Drawing/Part Number		
		N.T.S.	HAFSD 400SIDO185		