



BUNKER 15 OVAL SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP65

Application

A robust solution for residential and apartment interior or exterior covered eave utility spaces

Design Specifications

- Durable UV resistant white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt.
- CRI > 80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL7271CW/WH	LED BUNKER 15W OVAL IP65 4K WH	240	15	1050	4000	80
SL7271CW/BK	LED BUNKER 15W OVAL IP65 4K BK	240	15	1050	4000	80

Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)
SL7271CW/WH	110	WHITE	233(L) x 133(W) x 68(H)
SL7271CW/BK	110	BLACK	233(L) x 133(W) x 68(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

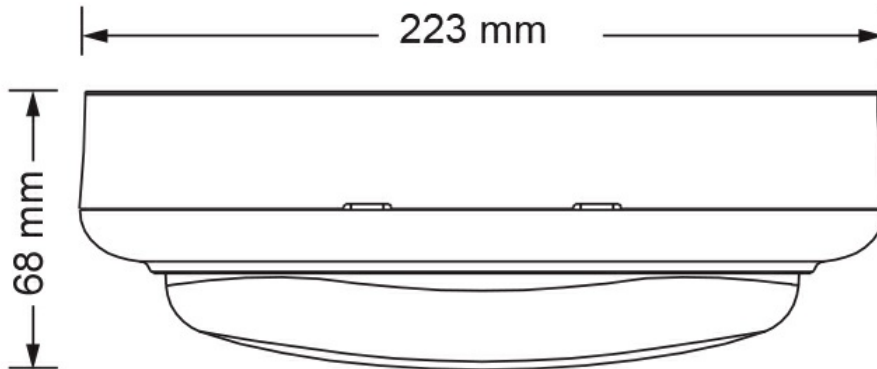

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SL7271CW/WH at 4000K

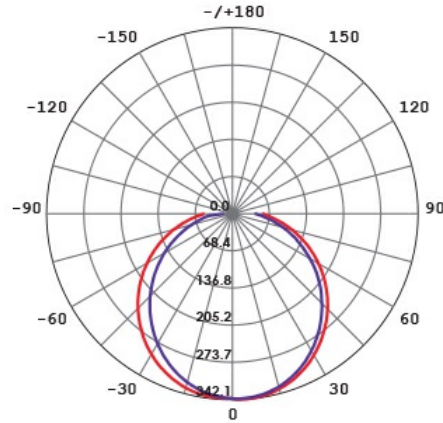



Product Images

