



## MEMPHIS SQUARE SL9719SQ - 22W

IP65 LED square surface mount luminaire, IK10 rated

### Application

A robust solution for industrial and commercial spaces

### Design Specifications

- Die-cast aluminium body, designed with multi access rear or side conduit entry points
- Frosted polycarbonate diffuser, silicon gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, with optional corridorSTANDBY function.
- Product selections compliant to AS/NZS2293  
Emergency Lighting & Exit Signs are located in the exterior emergency section of this catalogue



### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI/DSI**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICROWAVE**

### Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9719SQ	LED OYSTER SQ IP65 4K	240	22	1700	4000	80
SL9719SQ/C	LED OYSTER SQ IP65 4K CORRIDOR	240	22	1700	4000	80

### Technical Specification

Model No.	Body Colour	Dim (mm)
SL9719SQ	WHITE	316(L) x 316(W) x 102(H)
SL9719SQ/C	WHITE	316(L) x 316(W) x 102(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

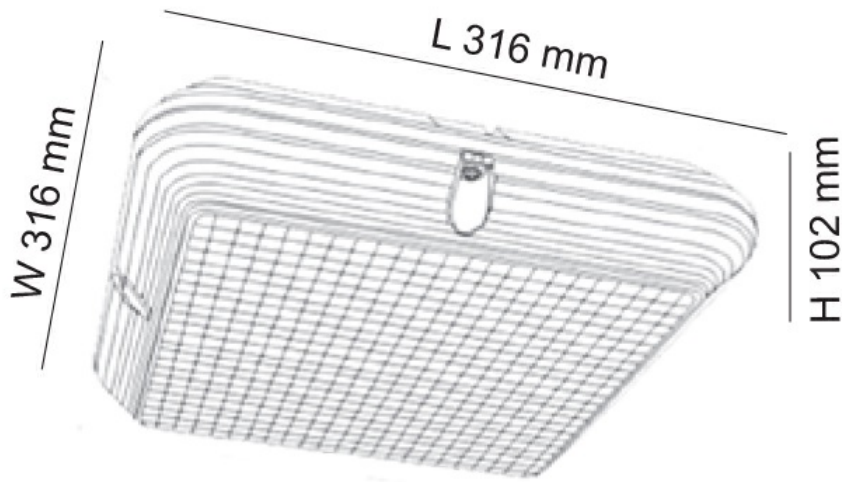

## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

### SL9719SQ at 4000K

