



## MEMPHIS SQUARE SL9719SQ/EM - 22W

Maintained emergency, 22 watt IP65 LED square surface mount luminaire, IK10 rated

### Application

A robust solution for industrial and commercial spaces

### Design Specifications

- Die-cast aluminium body
- Frosted polycarbonate diffuser, silicon gasket
- Stainless steel allen screws
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology
- Emergency spacing classification D32



- 
- 
- 
- 
- 
- 
- 

### Performance

Dimmable - **OPTIONAL**

### Technical Specification


Model No.	Description	Input Voltage (V/AC)	Lumens (lm)	Power (W)	CCT (K)	CRI
SL9719SQ/EM	LED OYSTER 316mm SQ IP65 4K WH	240	1700	22	4000	80

### Technical Specification

Model No.	Body Colour	Dim (mm)
SL9719SQ/EM	WHITE	316(L) x 316(W) x 102(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

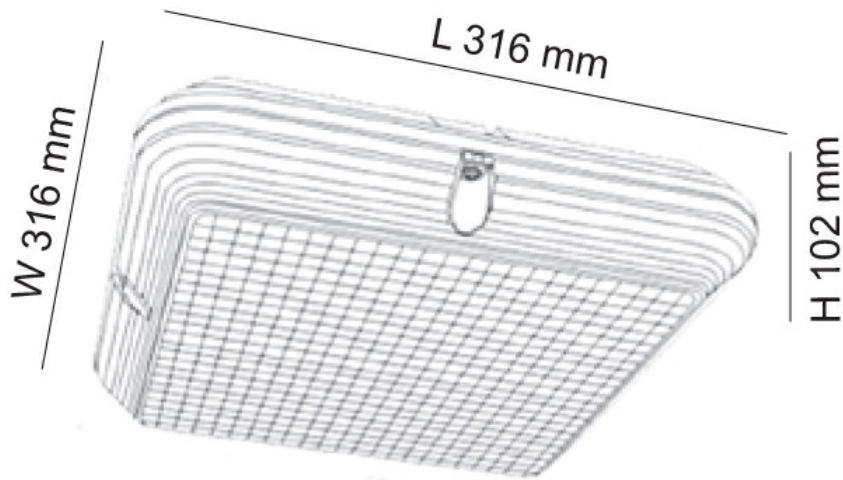

## Photometric Data

### Photometric Data (at maintained power)

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

#### SL9719SQ at 4000K

