



PANEL S9784TC/DP - 20/30W

20/30 watt LED High performance BACKLIT panel, 2IN1 packed

Application

Designed for commercial and office space lighting tasks.


Design Specifications

- Integral selectable power, 20/30 watt
- Easy selectable colour temperature with an integral DIP switch, 3000K/4000K/5700K
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI>80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Suspended wire kits unavailable for this series

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

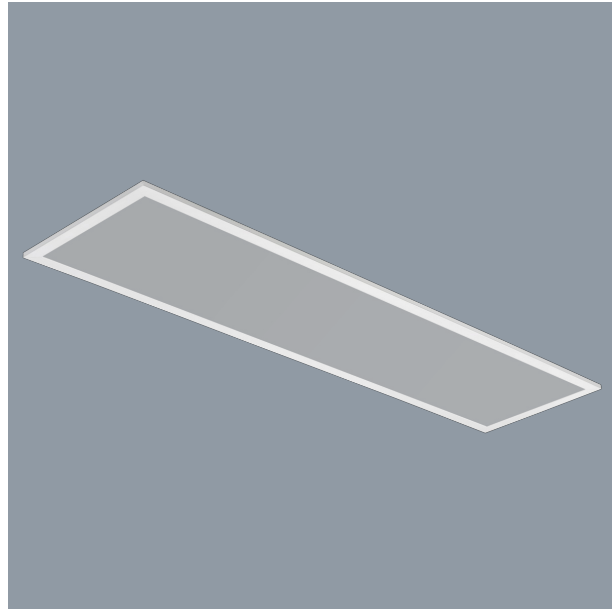

-
-
-
-
-
-
-
-
-

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
S9784/606TC/DP	LED PANEL 595 X 595 X 33mm	240	20/30	2750/3200/3000	3000/4000/5700	80
S9784/312TC/DP	LED PANEL 1195 X 295 X 33mm	240	20/30	2750/3050/2900	3000/4000/5700	80

Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9784/606TC/DP	110	WHITE	595(L) x 595(W) x 33(H)
S9784/312TC/DP	110	WHITE	1195(L) x 295(W) x 33(H)

Note (1) : Lumens (lm) shown are for TOTAL system performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.



Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9784/606TC/DP at 3000K

S9784/312TC/DP at 5700K

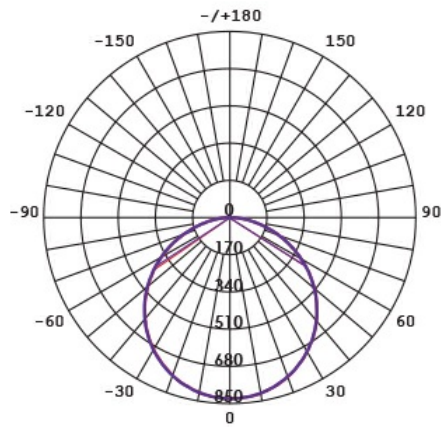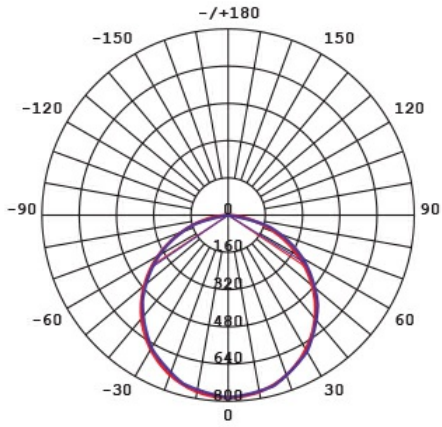

Product Images

