



## UFO II SHB25HE - 80/180W

Dimmable IP65 LED multi function highbay or lowbay

### Application

Low profile 1-10V dimmable LED highbay, ideal for commercial or industrial warehouse installations

### Design Specifications

- Multifunction highbay, with optional bracket assemblies to create a floodlight or lowbay
- Designed with integral control gear, flex and plug and a choice of optional sensor or power selection plug and play modules
- High efficiency SMD LED chips, with an impressive 150lm/W optical performance, CCT 5700K, CRI > 80
- 120 degree beam distribution, polycarbonate diffuser
- Integral 1-10v dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex and plug for easy installation
- Multifunction lowbay and metallic reflector accessories available for standard models, sensor or multipower optical accessories are not available



### Performance

Dimmable - **YES**

Dimmer Type - **1-10V**

## Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
SHB25HE80	LED HIGHBAY 80W 5700K	240	80	12000	5700	120
SHB25HES80	LED HIGHBAY 80W 5700K SENSOR	240	80	12000	5700	120
SHB25HEP80	LED HIGHBAY 80W 5700K MULTIPOWER	240	80	12000	5700	120
SHB25HE120	LED HIGHBAY 120W 5700K	240	120	18000	5700	120
SHB25HES120	LED HIGHBAY 120W 5700K SENSOR	240	120	18000	5700	120
SHB25HEP120	LED HIGHBAY 120W 5700K MULTIPOWER	240	120	18000	5700	120
SHB25HE180	LED HIGHBAY 180W 5700K	240	180	27000	5700	120
SHB25HES180	LED HIGHBAY 180W 5700K SENSOR	240	180	27000	5700	120
SHB25HEP180	LED HIGHBAY 180W 5700K MULTIPOWER	240	180	27000	5700	120
SHB25HES/RC	SHB25HES SENSOR REMOTE CONTROL	12				

## Technical Specification

Model No.	CRI	Body Colour	Dim (mm)	Mass (kg)
SHB25HE80	80	BLACK	320(W) x 252(H)	3.3
SHB25HES80	80	BLACK	320(W) x 252(H)	3.3
SHB25HEP80	80	BLACK	320(W) x 252(H)	3.3
SHB25HE120	80	BLACK	320(W) x 252(H)	3.5
SHB25HES120	80	BLACK	320(W) x 252(H)	3.5
SHB25HEP120	80	BLACK	320(W) x 252(H)	3.5
SHB25HE180	80	BLACK	320(W) x 267(H)	4
SHB25HES180	80	BLACK	320(W) x 267(H)	4
SHB25HEP180	80	BLACK	320(W) x 267(H)	4
SHB25HES/RC		WHITE		0.15

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions


SHB25 ACCESSORY COMPATIBILITY TABLE - MAY 2020

ACCESSORY	SHB25/120PFD	SHB25/120PFP	SHB25/120PLB	SHB25/120PMR	SHB25/120P90	SHB25/180P60	SHB25/180PFD	SHB25/180PFP	SHB25/180PLB
MODEL									
SHB25/80	YES	YES	YES	YES	YES				
SHB25/120	YES	YES	YES	YES	YES				
SHB25/180						YES	YES	YES	YES
SHB25HE/80	YES		YES	YES					
SHB25HE/120	YES		YES	YES					
SHB25HE/180	YES		YES	YES					


## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**SHB25HE80 at 5700K**

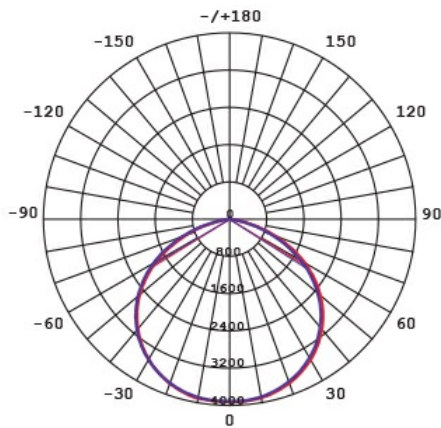

**SHB25HE120 at 5700K**

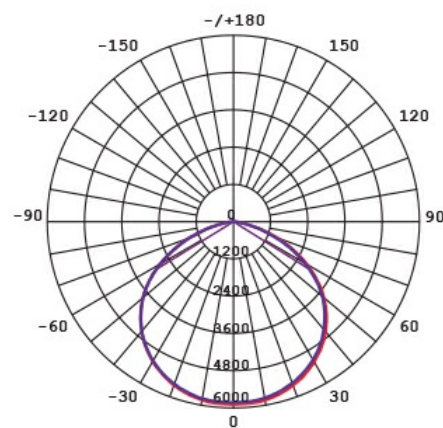

## Product Images



Accessories

