



UNIFIT S9007 - 9W

Dimmable fixed 9 watt LED downlight

Application

Ideal for any residential or commercial interior space

Design Specifications

- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, standard 60 degree beam distribution, optional 25 and 40 degree.
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver

Performance

Dimmable - YES Dimmer Type - Trailing edge, optional 1-10V, DALI / DSI



Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	ССТ (К)	Beam Angle (°)
S9007WW	LED D/L FIX. CURVED TRIM 3K WH	240	9	700	3000	60
S9007CW	LED D/L FIX. CURVED TRIM 4K WH	240	9	800	4000	60
S9007DL	LED D/L FIX. CURVED TRIM 6K WH	240	9	800	6000	60
S9007HC/WW	LED D/L FIX. CURVED TRIM 3K WH	240	9	620	3000	60

Technical Specification

Model No.	Dimmable	CRI	Body Colour	Dim (mm)
S9007WW	YES	80	matt white	82(W) x 90(H)
S9007CW	YES	80	matt white	82(W) x 90(H)
S9007DL	YES	80	matt white	82(W) x 90(H)
S9007HC/WW	YES	90	matt white	82(W) × 90(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458 www.sal.net.au





Dimensions



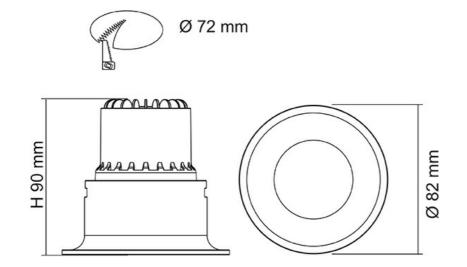





Photometric Data

Unit: cd C0/C180_____ C90/C270_____

S9007WW at 3000K

