



UNIFIT S9009 - 9W

Centre tilt 30 degree dimmable 9 watt LED downlight

Application

Ideal for any residential or commercial interior space

Design Specifications

- Die cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60 degree standard beam distribution, optional 25 and 40 degree.
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**



Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
S9009WW	LED D/L ADJUSTABLE 3K WHITE	240	9	700	3000	60
S9009CW	LED D/L ADJUSTABLE 4K WHITE	240	9	800	4000	60
S9009DL	LED D/L ADJUSTABLE 6K WHITE	240	9	800	6000	60
S9009HC/WW	LED D/L ADJUSTABLE 3K WHITE	240	8	620	3000	60

Technical Specification

Model No.	Dimmable	CRI	Body Colour	Dim (mm)
S9009WW	YES	80	matt white	82(W) x 102(H)
S9009CW	YES	80	matt white	82(W) x 102(H)
S9009DL	YES	80	matt white	82(W) x 102(H)
S9009HC/WW	YES	90	matt white	82(W) x 102(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

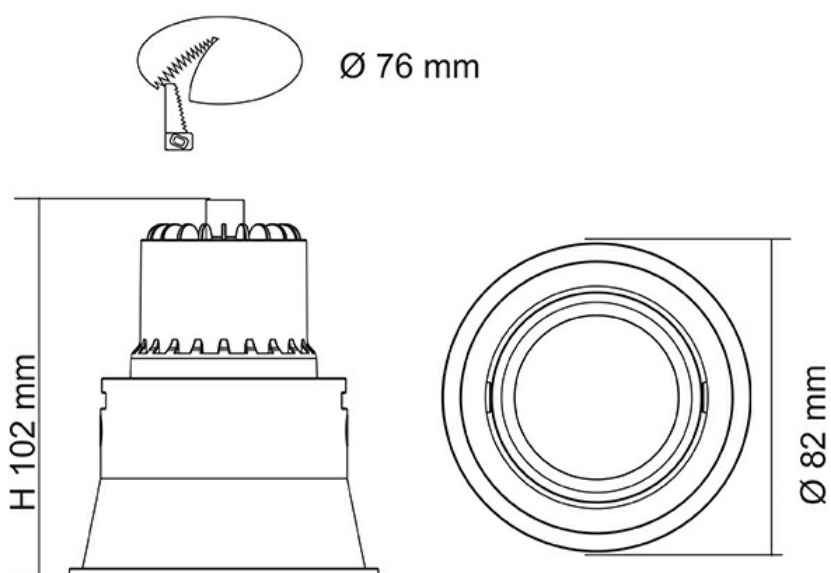

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9009WW at 3000K

