



SINCE 1998

SMARTER LIGHTING CHOICES



21/22

OUR SUCCESS IS MEASURED BY OUR CUSTOMERS SUCCESS.

Since 1998, SAL has continually thought about how we can enhance our customers lighting experience and strongly believe our success is measured by our customers success. It is the continual drive for achievements better than yesterday, that challenges our team to listen, learn and deliver valuable business outcomes for our customers.

CONTENTS

3-8



Interior Lighting



DOWNLIGHTS
Page 9



OYSTERS
Page 37



LINEAR BATTENS
& PANELS
Page 45



HIGHBAYS
Page 63



STRIP
PACKAGES
Page 67



LAMPS &
ACCESSORY
Page 71



Exterior Lighting



FLOODLIGHTS
Page 107



WEATHERPROOF
Page 115

INDEX page 127



DOWNLIGHTS

P11 WAVE S9064TC	P12 WAVE S9064TC T	P13 WAVE S9065TC	P14 WAVE S9065TC T	P15 WAVE S9066TC
P16 WAVE S9066TC T	P17 TRADEGEM S9140TC	P19 TRADEGEM S9141TC	P20 TRADEGEM S9141TC SM	P21 ECOSTAR II FIXED S9145TC
P22 ECOSTAR II GIMBAL S9146TC	P23 UNIFIT S9006TC	P24 UNIFIT S9007TC	P25 UNIFIT S9008TC	P26 UNIFIT S9009TC
P27 PREMIER S9072TC	P28 PREMIER S9073TC DP	P29 PREMIER S9074TC DP	P30 PREMIER S9075TC DP	P31 PREMIER S9076TC DP
P33 ALBANY S9514TC	P34 EXMOUTH S9522TC	P35 EXMOUTH S9523TC	P36 FIREFOX S9902F/120	



OYSTERS


P38 OPAL SO3700 TC DP	P40 OPAL II SO3800 EM	P41 FRISBEE SL2104 TC DP	P43 DISC SL2105 TC	P44 BENNY SL2106 TC
--------------------------	--------------------------	-----------------------------	-----------------------	------------------------



LINEAR BATTENS & PANELS



HIGHBAYS



STRIP PACKAGES





LAMPS & ACCESSORY





FLOODLIGHTS

P109 STARPAD II SE7171 TC



P111 TRADESTAR SE7169 TC



P113 STARGEM III SE7080 TC



P114 STARGEM III SE57080 TC



WEATHERPROOF

P117 BUNKER 15 OVAL SL7271



P118 BUNKER 15 SENSOR SL7271



P119 BUNKER 15 RD SL7272



P120 BUNKER 15 SENSOR SL7272



P121 NEW BONDI SL722X



P122 NEW BONDI II SL722X



P123 SOL SL9726 TC/DP






P125 SOL SL9726 TC/EM



**SAL HAS MADE PRODUCT
SELECTION EASY, JUST
LOOK FOR THE PRODUCT
PERFORMANCE SYMBOLS
ON EACH PAGE**







LED DOWNLIGHTS




WAVE S9064TC - 7W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips



Dimensions

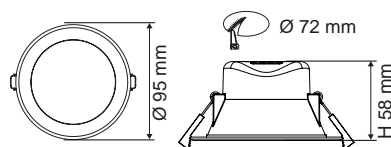

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9064TC WH at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9064TC WH	230/50	7	750/850/800	3000/4000/5700	> 80	90°	Yes	White

For interior products the IP rating stated is from below the ceiling




WAVE S9064TC T - 7W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with a terminal block
- High efficiency SMD LED chips



Dimensions

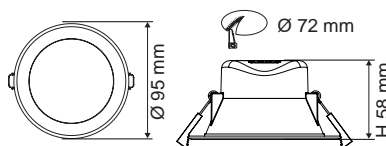

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9064TC/WH/T at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9064TC/WH/T	230/50	7	750/850/800	3000/4000/5700	> 80	90°	Yes	White




WAVE S9065TC - 8W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips



Dimensions

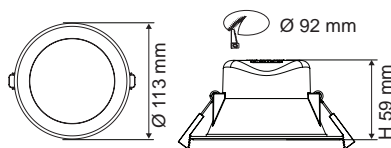

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9065TC WH at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC WH	230/50	8	800/950/850	3000/4000/5700	> 80	90°	Yes	White

For interior products the IP rating stated is from below the ceiling




WAVE S9065TC T - 8W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with a terminal block
- High efficiency SMD LED chips



Dimensions

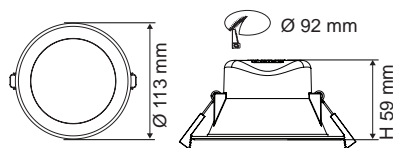

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9065TC/WH/T at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9065TC/WH/T	230/50	8	800/950/850	3000/4000/5700	> 80	90°	Yes	White


WAVE S9066TC - 12W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency SMD LED chips



Dimensions

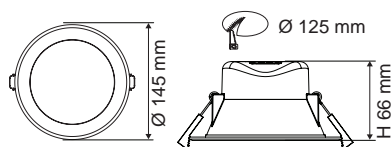

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9066TC WH at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9066TC WH	230/50	12	1300/1450/1350	3000/4000/5700	> 80	90°	Yes	White

For interior products the IP rating stated is from below the ceiling




WAVE S9066TC T - 12W

Dimmable IP44 LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, IC-F rated, double insulation 
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with a terminal block
- High efficiency SMD LED chips



Dimensions



Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9066TC/WH/T at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9066TC/WH/T	230/50	12	1300/1450/1350	3000/4000/5700	> 80	90°	Yes	White

TRADEGEM S9140TC - 9W

Dimmable IP44, 9 watt LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable extruded aluminium recessed mount body profile, IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

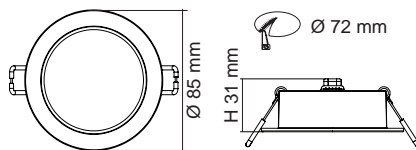

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9140TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9140TC/WH	230/50	9	720/800/800	3000/4000/5700	> 80	90°	Yes	White



TRADEGEM S9141TC - 9W

Dimmable IP44, 9 watt LED downlight with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable die-cast aluminium body profile, IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

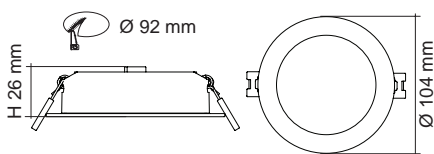

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge, Optional 1-10V, DALI / DS1

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9141TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC/WH	230/50	9	900/1050/1000	3000/4000/5700	> 80	90°	Yes	White

For interior products the IP rating stated is from below the ceiling



TRADEGEM S9141TC SM - 9W

Dimmable IP20, 9 watt surface mount LED
downlight with selectable colour temperature

Application

Ideal for any surface mount, residential or
commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Durable aluminium surface mount body profile, IP20
- Stylish white or black powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Integral constant current trailing edge dimmable LED driver, with flex and plug

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9141TC/WH/SM	230/50	9	850/950/900	3000/4000/5700	> 80	90°	Yes	White




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9141TC SM at 4000K



ECOSTAR II FIXED S9145TC - 10W

Dimmable fixed 10 watt LED downlight, with selectable colour temperature

Application

Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-faceted reflector system, 60° standard beam, optional 25° and 40°
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9145TC/WH	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	White




Dimensions

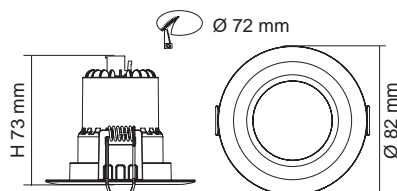


Photometric Data

Unit: cd C0/C180 — C90/C270

S9145TC at 3000K



S9145TC at 4000K





ECOSTAR II GIMBAL S9146TC - 10W

Dimmable gimbal 10 watt LED downlight,
with selectable colour temperature

Application

Ideal for any residential or
commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile 45° gimbal
- Stylish white powder coat finish
- High output COB LED chip
- Changeable multi-faceted reflector system, 60° standard beam, optional 25° and 40°
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug


Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge, Optional 1-10V,
DALI / DSI




Dimensions

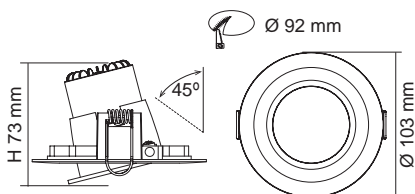


Photometric Data

Unit: cd C0/C180 — C90/C270

S9146TC at 3000K



S9146TC at 6000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9146TC/WH	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	White



UNIFIT S9006TC - 10W

Dimmable fixed 10 watt LED downlight,
with selectable colour temperature

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile
- Stylish powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

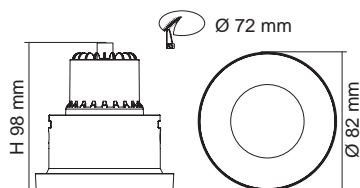

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V,
DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9006TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9006TC	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White

For interior products the IP rating stated is from below the ceiling



UNIFIT S9007TC - 10W

Dimmable fixed 10 watt LED downlight,
with selectable colour temperature

Application


Ideal for any residential or
commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile
- Stylish powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

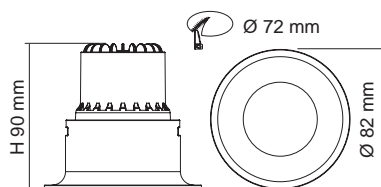

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V,
DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9007TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9007TC	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White

UNIFIT S9008TC - 10W

Dimmable fixed 10 watt LED downlight, with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile
- Stylish powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

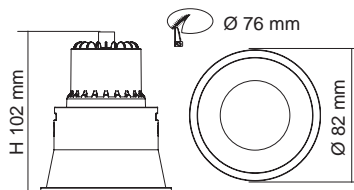

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9008TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9008TC	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Mat White

For interior products the IP rating stated is from below the ceiling



UNIFIT S9009TC - 10W

Centre tilt 30° dimmable 10 watt LED downlight, with selectable colour temperature

Application


Ideal for any residential or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/6000K
- Durable die-cast aluminium body profile
- Stylish powder coat finish
- High output COB LED chip
- Changeable multi-reflector system, 60° standard beam, 25° and 40° optional
- Polycarbonate optical lens
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

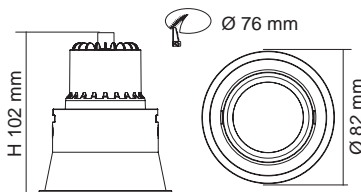

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9009TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9009TC	230/50	10	750/900/850	3000/4000/6000	> 80	60°	Yes	Matt White



TC SELECTABLE COLOUR

PREMIER S9072TC - 14W

Dimmable IP64, 14 watt LED downlight with selectable colour temperature

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Premium aluminium body profile
- IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

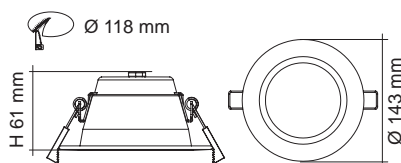

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9072TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9072TC WH	230/50	14	1000/1150/1150	3000/4000/5700	> 80	90°	Yes	White

For interior products the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

DUAL POWER

PREMIER S9073TC DP - 13W/18W

Dimmable IP64, 13/18 watt LED downlight with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Premium aluminium body profile
- IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex and plug



Dimensions

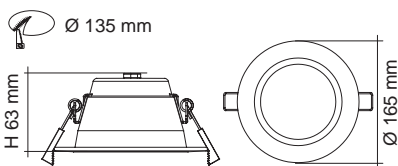

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9073TC/WH/DP at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9073TC/WH/DP	230/50	13/18	1100/1300/1100 1500/1800/1600	3000/4000/5700	> 80	90°	Yes	White

For terms and conditions of catalogue data use, refer to INDEX

Linked YouTube





TC SELECTABLE COLOUR

DUAL POWER

PREMIER S9074TC DP - 15W/20W

IP64, 15/20 watt LED downlight with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Premium aluminium body profile
- IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver, complete with flex and plug



Dimensions

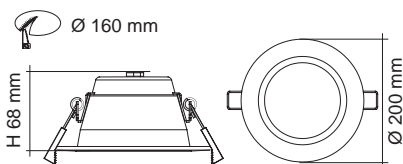

Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9074TC/WH/DP at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9074TC/WH/DP	230/50	15 20	1200/1400/1300 1600/1900/1700	3000/4000/5700	> 80	90°	Optional	White

For interior products the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

DUAL POWER

PREMIER S9075TC DP - 23W/30W

IP64, 23/30 watt LED downlight with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Premium aluminium body profile
- IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver, complete with flex and plug



Dimensions

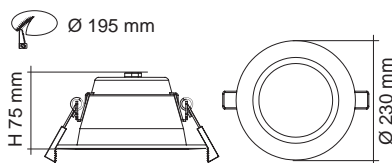

Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9075TC/WH/DP at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9075TC/WH/DP	230/50	23 30	2000/2300/2100 2600/3100/2800	3000/4000/5700	> 80	90°	Optional	White

For terms and conditions of catalogue data use, refer to INDEX

Linked in YouTube





PREMIER S9076TC DP - 30W/40W

Non-dimmable IP64, 30/40 watt LED downlight with selectable colour temperature and power

Application

Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Premium aluminium body profile
- IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver, complete with flex and plug


Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI




Dimensions

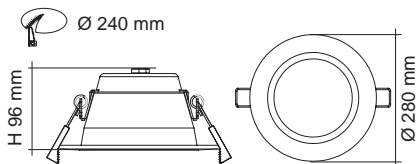

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9076TC/WH/DP at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9076TC/WH/DP	230/50	30 40	2600/3100/2800 3500/4200/3800	3000/4000/5700	> 80	90°	Optional	White

For interior products the IP rating stated is from below the ceiling

machi machi

PICK UP



machi
machi

I love you
so machi.

Blackwattle Bay NSW

Images courtesy of MKGS Construction & Paton Power



ALBANY S9514TC - 28W/36W

Recessed LED rectangular shop light with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5500K
- Twin 28W/36W setting with the integral DIP switch
- Adjustable up to 60°
- Constant current non-dimmable LED driver, complete with flex and plug
- Stylish white or silver powder coat finish an opal polycarbonate diffuser
- High efficiency SMD LED chips



Dimensions

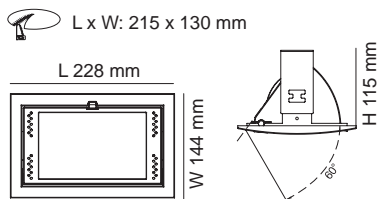


Performance

Dimmable Driver - Optional
Dimmer Type - Trailing edge, 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9514TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9514TC WH	230/50	28/36	2800/3600	3000/4000/5500	> 80	100°	Optional	White

For interior products the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

DUAL POWER

EXMOUTH S9522TC - 15W/22W

Recessed LED circular shop light with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5500K
- Twin 15W/22W setting with the integral DIP switch
- Durable die-cast aluminium body profile
- Constant current non-dimmable LED driver, complete with flex and plug
- Stylish powder coat finish with an opal polycarbonate diffuser
- High efficiency SMD LED chips



Dimensions

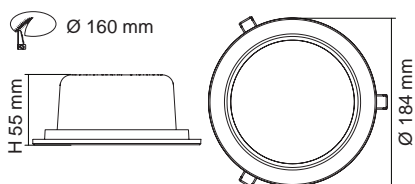

Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9522TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9522TC WH	230/50	15/22	1500/2100	3000/4000/5500	> 80	100°	Optional	White

For interior products the IP rating stated is from below the ceiling

Linked YouTube





TC SELECTABLE COLOUR

DUAL POWER

EXMOUTH S9523TC - 28W/40W

Recessed 28/40 watt LED rectangular shop light with selectable colour temperature and power

Application


Ideal for any retail or commercial interior space

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5500K
- Twin 28W/40W setting with the integral DIP switch
- Durable die-cast aluminium body profile, with white or silver trim
- Constant current non-dimmable LED driver, complete with flex and plug
- Stylish powder coat finish with an Opal polycarbonate diffuser
- High efficiency SMD LED chips



Dimensions

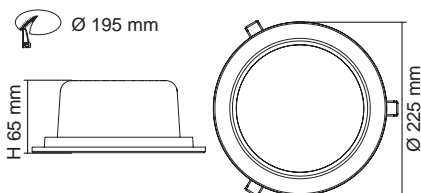

Performance


Dimmable Driver - Optional

Dimmer Type - Trailing edge, 1-10V, DALI / DSI

Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9523TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
S9523TC WH	230/50	28/40	2800/3800	3000/4000/5500	> 80	105°	Optional	White

For interior products the IP rating stated is from below the ceiling



FIREFOX S9902F/120-S9053TCP - 10W

10 watt dimmable LED downlight, with selectable colour temperature

Application


Ideal for any retail or commercial space

Design Specifications

- Steel canister profile
- Robust construction, white powder coat finish
- S9053 LED module fitted, 60° standard beam, 25° and 40° optional
- Constant current trailing edge dimmable LED driver, complete with flex and plug



Dimensions

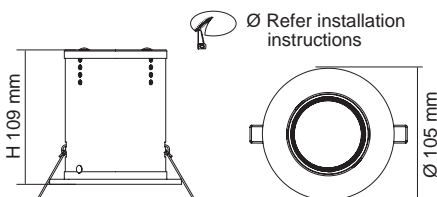

Performance

Dimmable Driver - Yes


Dimmer Type - Trailing edge, Optional 1-10V, DALI / DSI



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9902F-S9053 WP at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
S9902F/120-S9053TCP	230/50	10	750/900/850	3000/4000/6000	> 80	60°	White



LED OYSTERS



TC SELECTABLE COLOUR

DUAL POWER

OPAL SO3700 TC/DP - 8W/30W

LED Oyster 8 to 30 watt with selectable colour temperature and dual power

Application


A perfect choice for apartments or commercial spaces

Design Specifications

- Select colour temperature with DIP switch 3000K/4000K/6000K
- Durable powder coated steel body profile
- High performance opal PMMA diffuser
- High efficiency SMD LED chips, CRI >80
- Integral constant current LED driver, non-dimmable
- Integral dual power selection for DP models
- Two versatile profile sizes 8/16 or 15/30 watt



Dimensions


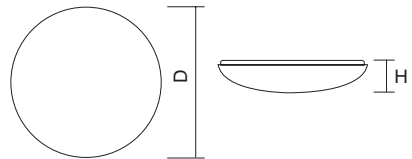


Photometric Data

Unit: cd C0/C180 — C90/C270 —

SO3700/30TC/DP at 4000K

SO3700/40TC/DP at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3700/30TC/DP	230/50	$\frac{8}{16}$	$\frac{580/680/600}{1180/1270/1200}$	3000/4000/6000	> 80	120°	White	Ø 330 x 100
SO3700/40TC/DP	230/50	$\frac{15}{30}$	$\frac{1220/1270/1230}{2160/2330/2200}$	3000/4000/6000	> 80	120°	White	Ø 380 x 110

For terms and conditions of catalogue data use, refer to INDEX

Linked YouTube



OPAL II SO3800 TC - 30W

30 watt dimmable LED Oyster
with selectable colour temperature

Application


A perfect choice for apartments,
residential or commercial spaces

Design Specifications

- Select the colour temperature with the integral DIP switch, 3000K/4000K/5700K
- 30 watt integral constant current trailing edge dimmable LED driver
- Durable powder coated steel body profile, colour white
- Opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80



Dimensions

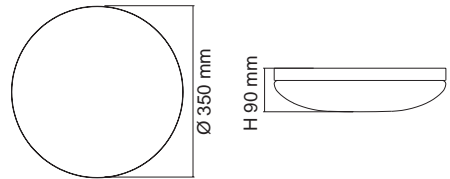

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SO3800/40TC at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SO3800/40TC	230/50	30	2400/2600/2500	3000/4000/5700	> 80	120°	White	Ø 350 x 90

For interior products the IP rating stated is from below the ceiling



TC SELECTABLE COLOUR

MAINTAINED

NON-MAINTAINED

OPAL II SO3800EM - 30W

Opal II emergency 30 watt
low profile oyster

Application

Emergency functions, perfect for
commercial and apartment requirements

Design Specifications

- Opal polycarbonate diffuser
- Power coated white steel body profile
- Selectable colour temperature with the integral DIP switch, 3000K/4000K/5700K
- Designed for both maintained and non maintained systems
- Compliant to AS/NZS 2293 emergency requirements, LiFePO4 battery included
- LED charge status display and test switch
- Guaranteed 90 minutes emergency function


Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge




Dimensions

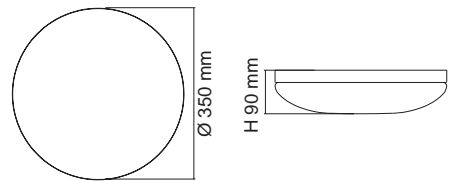

Photometric Data (power on)

Unit: cd C0/C180 — C90/C270

SO3800/40TC/EM at 3000K



Technical Specifications

Model No.	Input (V)/(Hz)	Emergency Power (W)	Battery Type	Emergency Classification	Dimensions (D x H mm)
SO3800/40TC/EM	230/50	2.5	IFR18650 6.4V, 1500mAh	D20@C0	Ø 350 x 90

For terms and conditions of catalogue data use, refer to INDEX

Linked YouTube





TC SELECTABLE COLOUR

DUAL POWER

FRISBEE SL2104 TC/DP - 8W/25W

Low profile recessed or surface mount
oyster with selectable colour temperature
and power

Application

A creative design for residential or
commercial spaces


Design Specifications

- Low profile design
- Durable white polyamide body profile with an opal polycarbonate diffuser
- High efficiency SMD LED chips, choice of selectable power 8/12W, 12/18W, 18/25W, and colour temperature 3000K/4000K/6000K
- Integral constant current non-dimmable driver
- Flexible cut-out sizes to suit retrofit recessed applications - SL2104/18TC 80-100mm, SL2104/22TC 120-200mm, SL2104/30TC 150-270mm



SL2104/18TC/DP

Dimensions



Performance


Dimmable Driver - No




Photometric Data

Unit: cd C0/C180 — C90/C270



SL2104/18TC at 4000K



SL2104/30TC at 6000K



For interior products the IP rating stated is from below the ceiling

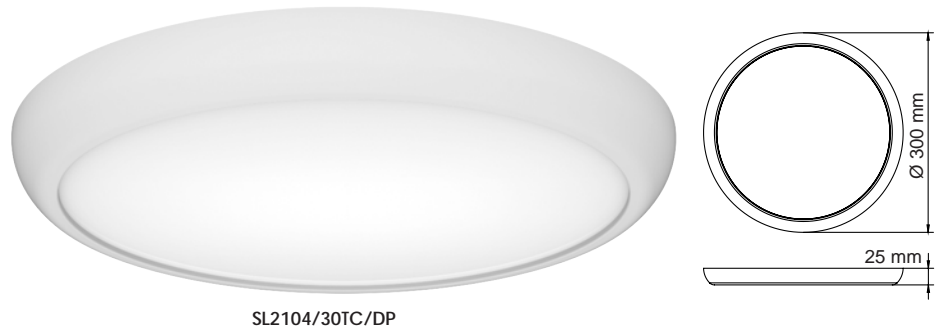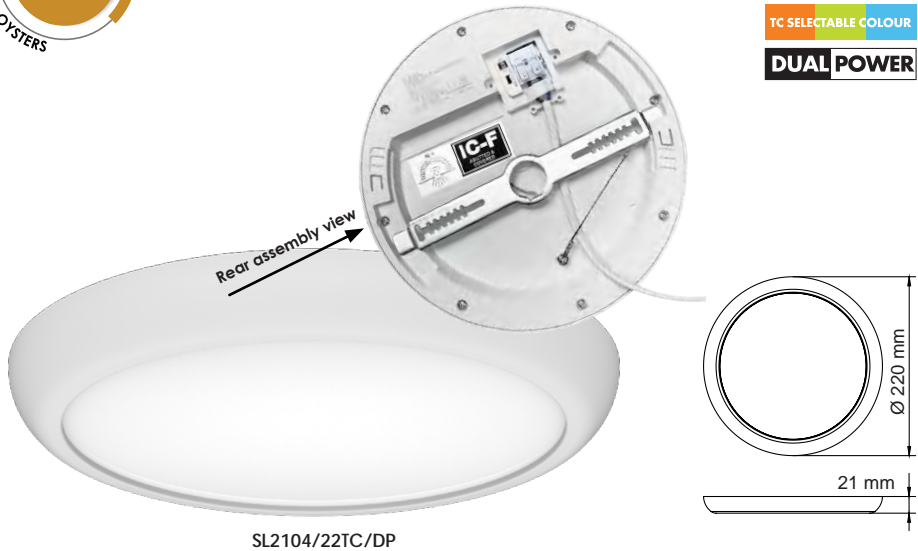

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL2104/18TC/DP	230/50	$\frac{8}{12}$	$\frac{520/560/560}{780/840/840}$	3000/4000/6000	> 80	110°	White	Ø 180 x 21
SL2104/22TC/DP	230/50	$\frac{12}{18}$	$\frac{840/900/900}{1260/1350/1350}$	3000/4000/6000	> 80	110°	White	Ø 220 x 21
SL2104/30TC/DP	230/50	$\frac{18}{25}$	$\frac{1350/1440/1440}{1875/2000/2000}$	3000/4000/6000	> 80	110°	White	Ø 300 x 25


DISC SL2105 TC - 12W/30W

Dimmable IP54 LED Oyster, 12, 25, 30 watt, with selectable colour temperature

Application


A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Robust white polycarbonate body profile, three sizes to select
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, selectable CCT 3000K/4000K/5700K
- Integral constant current trailing edge dimmable LED driver
- Low profile design, IP54
- Double insulation 



Dimensions

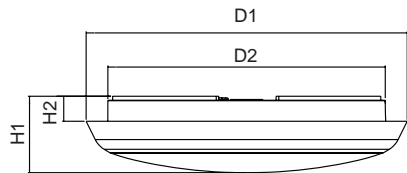

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge


Photometric Data

Unit: cd C0/C180 — C90/C270

SL2105/20TC at 4000K



SL2105/40TC at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D1 x H1, D2 x H2 mm)
SL2105/20TC	230/50	12	1100/1200/1200	3000/4000/5700	> 80	White	Ø 200 x 48, Ø 173 x 16
SL2105/30TC	230/50	25	2450/2600/2500	3000/4000/5700	> 80	White	Ø 300 x 40, Ø 271 x 13
SL2105/40TC	230/50	30	2800/3480/3000	3000/4000/5700	> 80	White	Ø 400 x 52, Ø 363 x 15

For interior products the IP rating stated is from below the ceiling


BENNY SL2106 TC - 10W/24W

IP65 LED Oyster with selectable colour temperature 3000K, 4000K, 6000K

Application

A perfect choice for apartments, residential or commercial spaces

Design Specifications

- Easy selectable the colour temperature with the integral DIP switch
- Durable polycarbonate body profile with UV resistant opal polycarbonate diffuser, colour white
- Rugged IK08 construction
- High efficiency SMD LED chips, CRI > 80
- Integral sensor models available
- Double insulation 

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Fitting Colour	Dimensions (D x H mm)
SL2106/20TC	230/50	10	800	3000/4000/6000	> 80	White	Ø 220 x 65
SL2106/30TC	230/50	20	1600	3000/4000/6000	> 80	White	Ø 280 x 71
SL2106/40TC	230/50	24	2000	3000/4000/6000	> 80	White	Ø 350 x 81




Dimensions

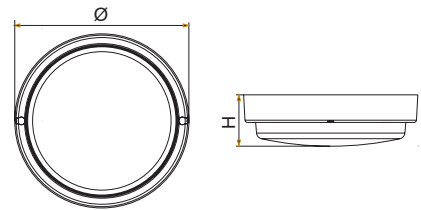


Photometric Data

Unit: cd C0/C180 — C90/C270

SL2106/20TC at 3000K



SL2106/40TC at 6000K





LED LINEAR BATTENS & PANELS

ECOLINE EMERGENCY SL9732 EM - 24W/50W

Compliant to AS/NZS 2293,
narrow body batten profile

Application


Perfect for interior commercial
emergency lighting installations



Design Specifications

- Narrow steel body (65mm) body profile, white powder coat finish
- Designed with a large terminal block for easy installation
- LiFePO4 battery technology for long life
- Designed for both maintained and non maintained systems
- High efficiency SMD LED chips on board
- Selectable colour temperature DIP switch, 3000K/4000K/5700K
- Integral constant current non-dimmable LED driver with selectable power
- Integral dual power selection
- LED charge status display and test switch
- Guaranteed 90 minutes emergency function


Dimensions

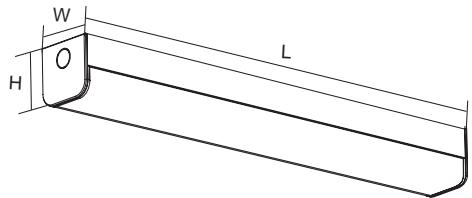


Photometric Data

Unit: cd C0/C180 C30/C210
C60/C240 C90/C270

SL9732/40EM at 5700K



SL9732/50EM at 5700K



Technical Specifications

Model No.	Input (V)/(Hz)	Emergency Power (W)	Battery Type	Emergency Classification	Dimensions (L x W x H)
SL9732/40EM	240/50	2.5	IFR18650 6.4V, 1500mAh	D50@C0, D32@C90	1135 x 65 x 65
SL9732/50EM	230/50	2.5	IFR18650 6.4V, 1500mAh	D50@C0, D40@C90	1455 x 65 x 65

ECOLINE SL9732 TC/DP2 - 12W/50W

LED narrow diffused batten with selectable colour temperature and dual power

Application

Conventional linear LED batten products for commercial service spaces

Design Specifications


- 65 mm narrow steel body
- Quality white powder coat finish with a robust polycarbonate diffuser
- Large terminal block, easy installation
- Easy selectable colour temperature with an inbuilt DIP switch 3000K/4000K/5700K (SL9732/TC/DP)
- High efficiency (>125lm/W) SMD LED, CRI >80, 120° beam distribution
- Integral constant current non-dimmable LED driver with selectable power
- Emergency options available compliant to AS/NZS2293

SL9732/20TC/DP2


SL9732/40TC/DP2

SL9732/50TC/DP2


Dimensions



SL9732/20TC



SL9732/40TC



SL9732/50TC

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge,

1-10V, DALI / DSI




Photometric Data

Unit: cd C0/C180 C30/C210 C60/C240 C90/C270

SL9732/20TC/DP2 at 4000K

SL9732/40TC/DP2 at 4000K

SL9732/50TC/DP2 at 4000K



For terms and conditions of catalogue data use, refer to INDEX



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9732/20TC/DP2	230/50	12/20	1540/1630/1680 2465/2650/2670	3000/4000/5700	> 80	120°	Optional	White
SL9732/40TC/DP2	230/50	24/40	3130/3330/3410 4800/5180/5230	3000/4000/5700	> 80	120°	Optional	White
SL9732/50TC/DP2	230/50	30/50	3900/4050/4180 5910/6270/6330	3000/4000/5700	> 80	120°	No	White

For terms and conditions of catalogue data use, refer to INDEX

WIDELINE S9733L TC - 20W/65W

LED wide diffused batten 20 - 65 watt
with selectable colour temperature

S9733L/206TC

Application


Low profile design suitable for residential
apartments and commercial service spaces

Design Specifications

- Wide pressed steel base with opal polycarbonate diffuser
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI >80, beam distribution 120°
- Integral constant current non-dimmable LED driver
- Easy selectable colour temperature with an inbuilt DIP switch, CCT 3000K/4000K/5700K
- Large terminal block, easy installation



Dimensions



Performance


Dimmable Driver - No

Photometric Data


Unit: cd C0/C180 — C30/C210
C60/C240 — C90/C270




S9733L/206TC at 3000K



S9733L/212TC at 4000K



S9733L/215TC at 5700K





S9733L/212TC



S9733L/215TC

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9733L/206TC	230/50	20	1800/2000/1800	3000/4000/5700	> 80	120°	White	610 x 160 x 60
S9733L/212TC	230/50	38	3700/3800/3700	3000/4000/5700	> 80	120°	White	1245 x 160 x 60
S9733L/215TC	230/50	65	5400/5800/5400	3000/4000/5700	> 80	120°	White	1500 x 160 x 60


SLIMLINE SEAMLESS TC LINKABLE SL9706 TC - 4W/22W

TC SEAMLESS SLIMLINE

Application

Great for commercial shop spaces,
home pantries, walk-in wardrobes

Design Specifications

- Selectable colour temperature 3000K, 4000K, 5500K, beam distribution 105°, CRI >80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex and plug included
- Accessories: SL9706/32CM LINK (L 320 mm)
SL9706/76CM LINK (L 760 mm)
- Double insulation 


Performance

Dimmable Driver - No



SL9706/280TC

Dimensions



SL9706/280

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Fitting Colour
SL9706/280TC	230/50	4	300/380/300	3000/4000/5500	> 80	105°	No	White
SL9706/540TC	230/50	9	750/800/750	3000/4000/5500	> 80	105°	No	White
SL9706/840TC	230/50	13	1050/1200/1050	3000/4000/5500	> 80	105°	No	White
SL9706/1140TC	230/50	18	1550/1600/1600	3000/4000/5500	> 80	105°	No	White
SL9706/1440TC	230/50	22	1800/2000/1800	3000/4000/5500	> 80	105°	No	White

For terms and conditions of catalogue data use, refer to INDEX

SL9706/540TC

SL9706/840TC

SL9706/1140TC

SL9706/1440TC



Dimensions

L 540 mm



H 36 mm



W 23 mm

SL9706/540

L 1140 mm



H 36 mm



W 23 mm

SL9706/1140

L 840 mm



H 36 mm



W 23 mm

SL9706/840

L 1440 mm



H 36 mm




W 23 mm

SL9706/1440


Maximum connections

Mixed connections maximum 240W

SL9706/280TC	1	2	3	4...	55pcs
SL9706/540TC	1	2	3	4...	25pcs
SL9706/840TC	1	2	3	4...	17pcs
SL9706/1140TC	1	2	3	4...	12pcs
SL9706/1440TC	1	2	3	4...	10pcs



SL9706/32CM LINK



SL9706/76CM LINK

BLADE SL9707 TC - 20W/40W

LED low profile batten with selectable colour temperature

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Extruded aluminium body with plastic end cap and rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 20 or 35 or 40 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, 120° beam

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9707/60TC	230/50	20	1800/1900/1850	3000/4000/5700	120°	White	597 x 80 x 35
SL9707/120TC	230/50	35	3300/3500/3400	3000/4000/5700	120°	White	1197 x 80 x 35
SL9707/150TC	230/50	40	4000/4600/4400	3000/4000/5700	120°	White	1485 x 80 x 35



SL9707/60TC


Dimensions




Photometric Data

Unit: cd C0/C180 — C90/C270


SL9707/60TC at 3000K



SL9707/120TC at 3000K



SL9707/150TC at 3000K





SL9707/120TC



SL9707/150TC



DIP switch

TC SELECTABLE COLOUR

WARM WHITE 3000K	COOL WHITE 4000K	DAYLIGHT 5700K
----------------------------	----------------------------	--------------------------



Rear cable channel

BLADE SL9709 TC - 25W/55W

LED low profile batten with selectable colour temperature

Application

Conventional LED profile battens for commercial service spaces

Design Specifications

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Extruded aluminium body with plastic end cap with a rear cable channel allowing easy wiring
- Quality white powder coat finish
- Integral constant current non-dimmable LED driver, 25 or 48 or 55 watt
- Robust opal polycarbonate diffuser
- High efficiency SMD LED chips, CRI >80, 120° beam

Performance

Dimmable Driver - No



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimension L x W x H (mm)
SL9709/60TC	230/50	25	2200/2600/2400	3000/4000/5700	120°	White	613 x 120 x 35
SL9709/120TC	230/50	48	4400/5000/4800	3000/4000/5700	120°	White	1213 x 120 x 35
SL9709/150TC	230/50	55	5600/6200/6000	3000/4000/5700	120°	White	1485 x 120 x 35

For terms and conditions of catalogue data use, refer to INDEX



SL9709/60TC


Dimensions

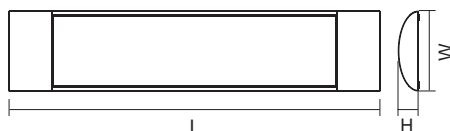


Photometric Data

Unit: cd C0/C180 — C90/C270


SL9709/60TC at 3000K



SL9709/120TC at 3000K



SL9709/150TC at 3000K





SL9709/120TC



SL9709/150TC



DIP switch

TC SELECTABLE COLOUR

WARM WHITE	COOL WHITE	DAYLIGHT
3000K	4000K	5700K



Rear cable channel

PANEL S9784 TC/DP - 16W/40W

LED panel with selectable colour temperature and power

Application

Designed for commercial and office space lighting tasks


Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Seismic restraint kits available for full range (HSEISKIT)

S9784/312TC/DP



Dimensions



Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge
1-10V, DALI / DSI




Photometric Data

Unit: cd C0/C180 — C90/C270


S9784/606TC/DP at 4000K



S9784/312TC/DP at 4000K





S9784/612TC/DP at 4000K





For interior products the IP rating stated is from below the ceiling

S9784/606TC/DP

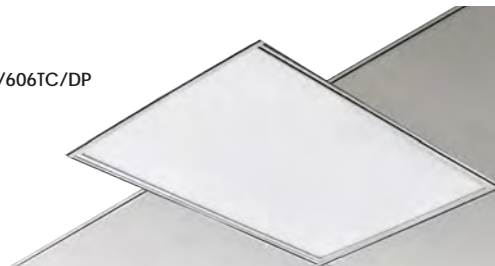

S9784/612TC/DP

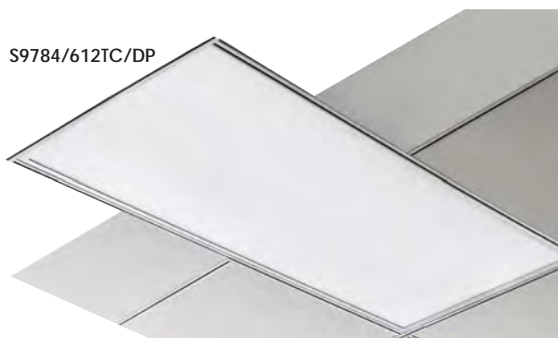

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9784/606TC/DP	230/50	16 27	1750/1850/1800 2850/3000/2900	3000/4000/5700	110°	White	595 x 595 x 32
S9784/312TC/DP	230/50	16 27	1750/1850/1800 2850/3000/2900	3000/4000/5700	110°	White	1195 x 295 x 32
S9784/612TC/DP	230/50	24 40	2850/3000/2900 4500/4750/4600	3000/4000/5700	110°	White	1195 x 595 x 32

PANEL S9784U TC/DP - 16W/40W

LED High performance panel with selectable colour temperature and power

Application

Designed for commercial and office space lighting tasks


Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5000K
- Seismic restraint kits available for full range(HSEISKIT)

S9784U312TC/DP



Dimensions



Performance

Dimmable Driver - Optional


Dimmer Type - Trailing edge
1-10V, DALI / DSI




Photometric Data

Unit: cd C0/C180 — C90/C270


S9784U606TC/DP at 4000K



S9784U312TC/DP at 4000K





S9784U612TC/DP at 4000K





For interior products the IP rating stated is from below the ceiling

S9784U606TC/DP

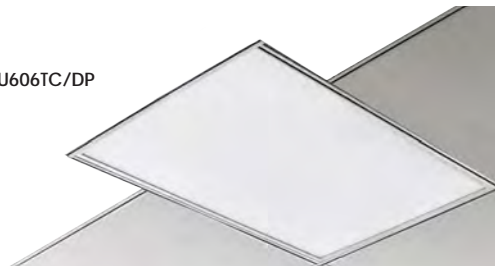

S9784U612TC/DP

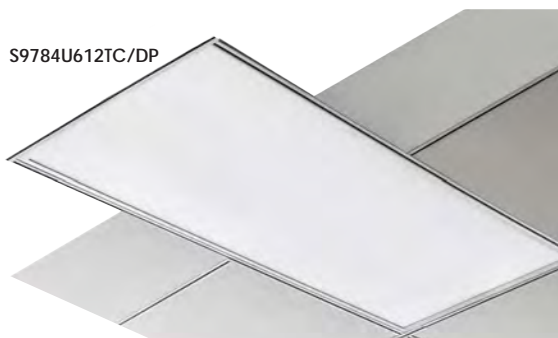

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
S9784U606TC/DP	230/50	16 27	1650/1750/1700 2700/2850/2750	3000/4000/5000	80°	White	595 x 595 x 32
S9784U312TC/DP	230/50	16 27	1650/1750/1700 2700/2850/2750	3000/4000/5000	80°	White	1195 x 295 x 32
S9784U612TC/DP	230/50	24 40	2850/3000/2900 4500/4750/4600	3000/4000/5000	80°	White	1195 x 595 x 32

S-FM SURFACE MOUNT FRAME

LED panel installation type S-FM surface mounted frame

Application


Designed for commercial interior office spaces



Design Specifications

- Pressed steel base
- Quality powder coated finish
- For S312FM and S606FM add the suffix /P2 to the order code, for kit form assemblies supplied ready for easy assembly on site

Dimensions

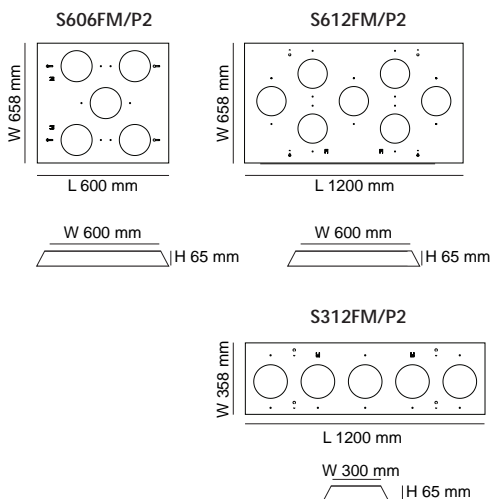

Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S312FM/P2	S9784/312TC/DP, S9784U312TC/DP	White
S606FM/P2	S9784/606TC/DP, S9784U606TC/DP	White
S612FM/P2	S9784/612TC/DP, S9784U612TC/DP	White

For terms and conditions of catalogue data use, refer to INDEX

RECESSED CEILING FRAME (METRIC) S9704

LED panel frame for
recessed plaster ceiling

Application

Designed for commercial interior
office spaces


Design Specifications

- Pressed steel base
- Quality white powder
coated finish




Dimensions


FRAME



PANEL



RECESSED PANEL




S9704/414 FRAME



L x W: 610 x 610 mm

L 630 mm




S9704/328 FRAME



L x W: 1210 x 610 mm

L 1230 mm




S9704/228 FRAME



L x W: 1210 x 310 mm

L 1230 mm



Technical Specifications

Model No.	Suitable LED Fittings	Fitting Colour
S9704/228/FRAME	S9754/312 range, S9784/312 range	White
S9704/328 FRAME	S9754/612 range, S9784/612 range	White
S9704/414 FRAME	S9754/606 range, S9784/606 range	White

For terms and conditions of catalogue data use, refer to INDEX



**LED
HIGHBAYS**



UFO II SHB25HE - 80W/180W

Dimmable IP65 LED UFO multi-function highbay or lowbay

Application

Ideal for any commercial or industrial interior space


Design Specifications

- Multi-function highbay or lowbay with optional quick connect step dimming sensor
- Die-cast aluminium body
- Powder coated finish
- High efficiency SMD LED chips
- Clear polycarbonate diffuser, 120° lens
- Integral 1-10V dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex and plug for easy installation



SHB25HE High Bay

Dimensions



Performance

Dimmable Driver - Yes


Dimmer Type - 1-10V




Photometric Data

Unit: cd C0/C180 — C90/C270

SHB25HE80 at 4000K




SHB25HE120 at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H1, H2 mm)	Net Weight
SHB25HE80CW	230/50	80	12000	4000	> 80	120°	Black	251 x 57, 175	2.2 kg
SHB25HE120CW	230/50	120	18000	4000	> 80	120°	Black	271 x 65, 183	2.4 kg
SHB25HE180CW	230/50	180	27000	4000	> 80	120°	Black	341 x 66, 184	3.2 kg

For terms and conditions of catalogue data use, refer to INDEX



SHB25HE Low Bay

Optional Sensor


Accessories



Bracket for Low Bay
SHB25HE120PLB
SHB25HE180PLB



Metal reflector
SHB25HE120PMR
SHB25HE180PMR



Clear polycarbonate reflector
SHB25HE120PPR
SHB25HE180PPR



DALI signal converter
LM-DALI010B



corridorSTANDBY sensor
SHB25HE/CS



Remote control
SHB25HE/RC



Daylight harvesting sensor
SMS761



LED STRIP PACKAGES



FLEXI 12V RGB COLOUR SELECT, 5M KIT, IP44 FLP12V5M/RGB - 6W/M

A creative 12V, 5m RGB, IP44, LED flexible strip kit

Application


Decorative residential features, bar areas, kitchens and stairs



Design Specifications

- Silicon covered 12V weatherproof LED flexible strip with **3M**® self adhesive tape
 - Plug and play ready to use
 - 5m length, cuttable every 100 mm at designated cut lines.
- NOTE: when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads
- Multi-function remote controller included
 - IP44 weatherproof strip, IP20 driver
 - LED channel options refer this section
 - Heat sink required for system performance

Dimensions

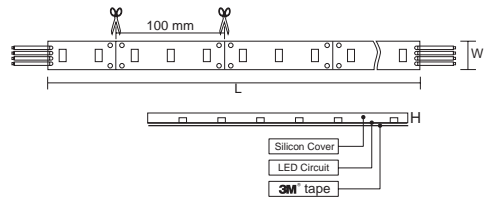

Performance

Dimmable Driver - Yes
Dimmer Type - LED controller



Technical Specifications

Model No.	Input (V/Hz)	Power (W/m)	Wavelength (nm)	Beam Angle	Cuttable Length	Dimensions L x W x H (mm)	LED Quantity
FLP12V5M/RGB	230/50	6	R: 620~625 G: 515~520 B: 465~470	140°	100 mm	5000 x 10 x 3	30 p/m

For terms and conditions of catalogue data use, refer to INDEX



FLEXI 12V SINGLE COLOUR IP44 2M STRIP KIT FLP12V2M/S - 6W/M

Single white colour 12V, LED strip KIT 2m



Application

A creative solution for residential and commercial interior spaces


Design Specifications

- 12V weatherproof LED flexible strip with **3M**® self-adhesive tape
- Pre-wired strip kit includes IP20 LED driver, IP44 LED strip & 1.2 m flex & 2 pin plug
- Non-dimmable driver as standard, optional dimmable driver to order.
- High efficiency SMD LED chips, beam angle 140°
- Choice of 3000K or 5000K
- Heat sink required for system performance
- Cuttable every 50 mm at the scissors symbol, 2m kits

NOTE: when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads.

- LED channel options refer this section

Dimensions

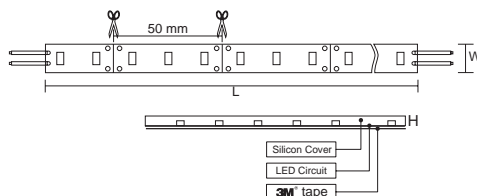

Performance

Dimmable Driver - Optional



Technical Specifications

Model No.	Input (V/Hz)	Power (W/m)	Lumen (lm/m)	CCT (K)	CRI	Beam Angle	Cuttable Length	Dimensions L x W x H (mm)	LED Quantity
FLP12V2M/WW/S	230/50	6	350	3000	> 80	140°	50 mm	2000 x 8 x 2.5	60 p/m
FLP12V2M/NDL/S	230/50	6	350	5000	> 80	140°	50 mm	2000 x 8 x 2.5	60 p/m

For terms and conditions of catalogue data use, refer to INDEX



FLEXI 12V SINGLE COLOUR IP44 5M STRIP KIT FLP12V5M/S - 6W/M

Single white colour 12V, LED strip KIT 5m

Application

A creative solution for residential and commercial interior spaces


Design Specifications

- 12V weatherproof LED flexible strip with **3M**® self-adhesive tape
- Pre-wired strip kit includes IP20 LED driver, IP44 LED strip & 1.2 m flex & 2 pin plug
- Non-dimmable driver as standard, optional dimmable driver to order.
- High efficiency SMD LED chips, beam angle 140°
- Choice of 3000K or 5000K
- Heat sink required for system performance
- Cutable every 50 mm at the scissors symbol, 5m kits

NOTE: when cutting LED strips, it is always important to calculate the remaining LED load to reconfirm its compatibility with the existing driver, as driver changes may be required with moderate reduction in loads.

- LED channel options refer this section

Dimensions

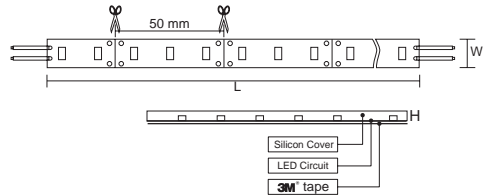

Performance

Dimmable Driver - Optional



Technical Specifications

Model No.	Input (V/Hz)	Power (W/m)	Lumen (lm/m)	CCT (K)	CRI	Beam Angle	Cutable Length	Dimensions L x W x H (mm)	LED Quantity
FLP12V5M/WW/S	230/50	6	350	3000	> 80	140°	50 mm	5000 x 8 x 2.5	60 p/m
FLP12V5M/NDL/S	230/50	6	350	5000	> 80	140°	50 mm	5000 x 8 x 2.5	60 p/m

For terms and conditions of catalogue data use, refer to INDEX



LED LAMPS & ACCESSORY



**SMARTER LAMP
CHOICES FOR ANY
PLACE CALLED
HOME**


CLEAR DIMMABLE LG5 - 4W

4 watt dimmable LED filament
GLS style lamps

Application

Energy efficient LED lamp solutions,
4 watt models

Design Specifications


- Clear glass diffuser, ES or BC base
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation 

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge



Dimensions

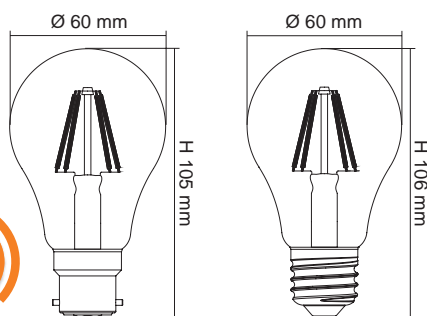

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG5/27B22D/C	230/50	4	500	2700	> 80	320°	Yes	B22
LG5/27E27D/C	230/50	4	500	2700	> 80	320°	Yes	E27
LG5/50B22D/C	230/50	4	550	5000	> 80	320°	Yes	B22
LG5/50E27D/C	230/50	4	550	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX


CLEAR DIMMABLE LG9 - 8W

8 watt dimmable LED filament
GLS style lamps

Application

Energy efficient LED lamp solutions,
8 watt models

Design Specifications

- Clear glass diffuser, ES or BC base
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation 

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge





LG9 B22



LG9 E27

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG9/27B22D/C	230/50	8	950	2700	> 80	320°	Yes	B22
LG9/27E27D/C	230/50	8	950	2700	> 80	320°	Yes	E27
LG9/50B22D/C	230/50	8	1000	5000	> 80	320°	Yes	B22
LG9/50E27D/C	230/50	8	1000	5000	> 80	320°	Yes	E27


OPAL DIMMABLE LG5 - 4W

4 watt dimmable LED filament
GLS style lamps

Application

Energy efficient LED lamp solutions,
4 watt models

Design Specifications


- Opal glass diffuser, ES or BC base
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation 

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge



Dimensions

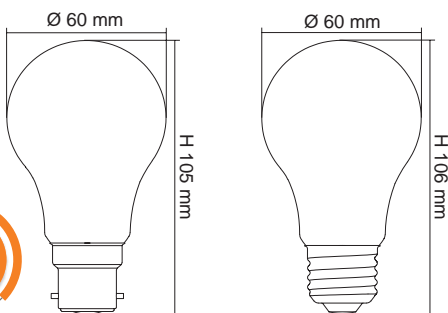

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG5/27B22D	230/50	4	450	2700	> 80	320°	Yes	B22
LG5/27E27D	230/50	4	450	2700	> 80	320°	Yes	E27
LG5/50B22D	230/50	4	500	5000	> 80	320°	Yes	B22
LG5/50E27D	230/50	4	500	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX


OPAL DIMMABLE LG9 - 8W

8 watt dimmable LED filament
GLS style lamps

Application

Energy efficient LED lamp solutions,
8 watt models

Design Specifications

- Opal glass diffuser, ES or BC base
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation 

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge





LG9 B22



LG9 E27

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG9/27B22D	230/50	8	900	2700	> 80	320°	Yes	B22
LG9/27E27D	230/50	8	900	2700	> 80	320°	Yes	E27
LG9/50B22D	230/50	8	950	5000	> 80	320°	Yes	B22
LG9/50E27D	230/50	8	950	5000	> 80	320°	Yes	E27

CANDLE CLEAR DIMMABLE LCA - 4W


4 watt dimmable LED filament
candle style clear lamps



Application


Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings
- Double insulation 



Dimensions

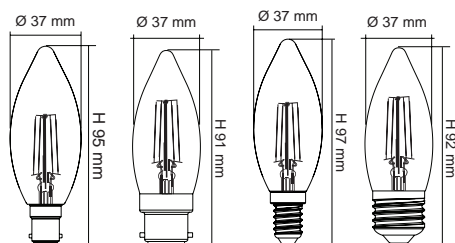

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LCA27B15D/C	230/50	4	450	2700	> 80	320°	Yes	B15
LCA27B22D/C	230/50	4	450	2700	> 80	320°	Yes	B22
LCA27E14D/C	230/50	4	450	2700	> 80	320°	Yes	E14
LCA27E27D/C	230/50	4	450	2700	> 80	320°	Yes	E27
LCA50B15D/C	230/50	4	450	5000	> 80	320°	Yes	B15
LCA50B22D/C	230/50	4	450	5000	> 80	320°	Yes	B22
LCA50E14D/C	230/50	4	450	5000	> 80	320°	Yes	E14
LCA50E27D/C	230/50	4	450	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX

CANDLE OPAL DIMMABLE LCA - 4W


4 watt dimmable LED filament
candle style opal lamps



Application

Energy efficient LED lamp solutions

Design Specifications

- Opal glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings
- Double insulation 


Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



Dimensions

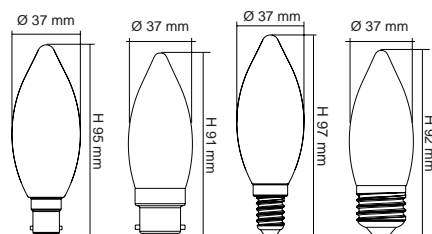

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LCA27B15D	230/50	4	400	2700	> 80	320°	Yes	B15
LCA27B22D	230/50	4	400	2700	> 80	320°	Yes	B22
LCA27E14D	230/50	4	400	2700	> 80	320°	Yes	E14
LCA27E27D	230/50	4	400	2700	> 80	320°	Yes	E27
LCA50B15D	230/50	4	400	5000	> 80	320°	Yes	B15
LCA50B22D	230/50	4	400	5000	> 80	320°	Yes	B22
LCA50E14D	230/50	4	400	5000	> 80	320°	Yes	E14
LCA50E27D	230/50	4	400	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX

Linked   YouTube



FANCY ROUND CLEAR DIMMABLE LFR - 4W


4 watt dimmable LED filament fancy round clear style lamps



Application

Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings
- Double insulation 




Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge



Dimensions

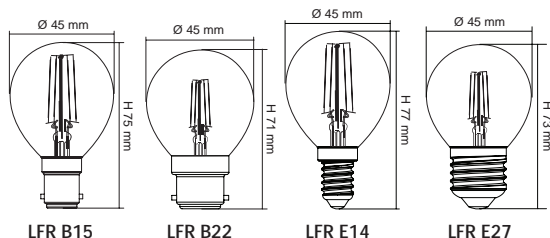

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LFR27B15D/C	230/50	4	450	2700	> 80	320°	Yes	B15
LFR27B22D/C	230/50	4	450	2700	> 80	320°	Yes	B22
LFR27E14D/C	230/50	4	450	2700	> 80	320°	Yes	E14
LFR27E27D/C	230/50	4	450	2700	> 80	320°	Yes	E27
LFR50B15D/C	230/50	4	450	5000	> 80	320°	Yes	B15
LFR50B22D/C	230/50	4	450	5000	> 80	320°	Yes	B22
LFR50E14D/C	230/50	4	450	5000	> 80	320°	Yes	E14
LFR50E27D/C	230/50	4	450	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX

FANCY ROUND OPAL DIMMABLE LFR - 4W


4 watt dimmable LED filament fancy round opal style lamps



Application

Energy efficient LED lamp solutions

Design Specifications

- Opal glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings
- Double insulation 




Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge

Dimensions

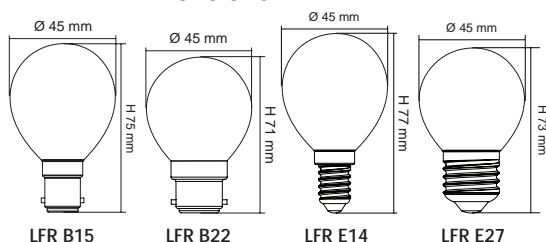

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LFR27B15D	230/50	4	400	2700	> 80	320°	Yes	B15
LFR27B22D	230/50	4	400	2700	> 80	320°	Yes	B22
LFR27E14D	230/50	4	400	2700	> 80	320°	Yes	E14
LFR27E27D	230/50	4	400	2700	> 80	320°	Yes	E27
LFR50B15D	230/50	4	400	5000	> 80	320°	Yes	B15
LFR50B22D	230/50	4	400	5000	> 80	320°	Yes	B22
LFR50E14D	230/50	4	400	5000	> 80	320°	Yes	E14
LFR50E27D	230/50	4	400	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX

TUBULAR CLEAR LT25 - 2W

2 watt LED filament tubular lamp


CLEAR LP25 - 1.5W

1.5 watt LED filament tubular pilot lamp

Application

Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, E14 base, 240V
- High efficiency LED filament and colour rendering, CRI >80
- Integral non-dimmable LED driver
- 320° beam angle
- Colour temperature 3000K
- Suitable to replace equivalent incandescent tubular lamp or pilot lamp
- Double insulation 

Performance

Dimmable Driver - No





LT25F830E14



LP25F830E14

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT25F830E14	230/50	2	200	3000	> 80	320°	No	E14
LP25F830E14	230/50	1.5	150	3000	> 80	320°	No	E14

VINTAGE DECO LST21FD - 1W

1 watt LED filament vintage deco lamp, E27 base


SPHERICAL DECO LG125FD - 1W

1 watt LED filament spherical deco lamp

Application

Energy efficient LED lamp solutions, ideal for restaurants and residential features

Design Specifications

- Champagne coloured glass diffuser for decorative applications
- High efficiency LED filament and colour rendering, CRI >80
- Integral non-dimmable LED driver, E27 base, 240V
- 320° beam angle
- Colour temperature 2200K
- Double insulation 

Performance

Dimmable Driver - No





LG125FD822E27



LST21FD822E27

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LST21FD822E27	230/50	1	100	2200	> 80	320°	No	E27
LG125FD822E27	230/50	1	100	2200	> 80	320°	No	E27

VINTAGE DECO LST21 - 8W


8 watt LED filament vintage deco lamp,
B22 & E27 base



Application

Energy efficient LED lamp solutions, ideal
for restaurants and residential features

Design Specifications


- Glass diffuser for decorative applications
- High efficiency LED filament and colour rendering, CRI >80,
- Colour temperature, choice of 3000K/5000K
- Integral dimmable LED driver, 240V
- 320° beam angle
- Double insulation 



Performance

Dimmable - Yes

Dimensions

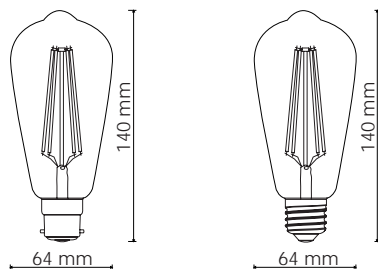

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LST21WWB22D/C	230/50	8	1050	3000	> 80	320°	Yes	B22
LST21WWE27D/C	230/50	8	1050	3000	> 80	320°	Yes	E27
LST21NDLB22D/C	230/50	8	1050	5000	> 80	320°	Yes	B22
LST21NDLE27D/C	230/50	8	1050	5000	> 80	320°	Yes	E27

For terms and conditions of catalogue data use, refer to INDEX




LED TUBE LT8 TC - 9W/24W

LED shatter-proof tube, G13 base

Application

Energy efficient LED lamp solutions

Design Specifications

- Fit new T8 LED fixture or retrofit T8 fluorescent fixture (Magnetic Ballast)
- Traditional full glass shatter-proof poly coated body construction
- G13 lamp base
- High efficiency SMD LED chips, CRI >80, beam 320°
- Integral non-dimmable LED driver, 9 or 18 or 24 watt models
- Colour temperature selectable 3000K/4000K/6000K
- No flicker, instant start, Safety LED fuse included
- Double insulation 

Performance

Dimmable Driver - No



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions Ø x L mm	Lamp Base
LT8/60TC	230/50	9	900/1100/1000	3000/4000/6000	> 80	320°	28 x 589	G13
LT8/120TC	230/50	18	1800/2200/2000	3000/4000/6000	> 80	320°	28 x 1198	G13
LT8/150TC	230/50	24	2300/2500/2400	3000/4000/6000	> 80	320°	28 x 1500	G13

LT8/150TC



LT8/120TC



LT8/60TC



WARNING:

The luminaire that these LED tubes are installed in may need to be converted in accordance with AS/NZS60598.2.1:2014 by a suitably qualified person. In all instances any electronic components (i.e. driver, electronic ballast, capacitor) must be removed from the circuit. Refer installation instructions for more details, in particular the lamp orientation to the ACTIVE supply.



CLEAR SPHERICAL LG95 - 6W

6 watt dimmable LED filament clear spherical lamp

CLEAR SPHERICAL LG125 - 8W

8 watt dimmable LED filament clear spherical lamp


Application

Energy efficient Deco LED lamp solutions,
B22 or E27 bases




LG95/B22

Design Specifications

- Clear glass diffuser, B22 or E27 bases
- High efficiency LED filament and colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature, choice of 2700K/5000K
- 1:1 size to traditional spherical lamp, dimmable, Suits most spherical lamp fittings
- Double insulation 

Dimensions



Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge








LG95/E27



LG125/B22



LG125/E27



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG95/27B22D/C	230/50	6	750	2700	> 80	320°	Yes	B22
LG95/27E27D/C	230/50	6	750	2700	> 80	320°	Yes	E27
LG95/50B22D/C	230/50	6	800	5000	> 80	320°	Yes	B22
LG95/50E27D/C	230/50	6	800	5000	> 80	320°	Yes	E27
LG125/27B22D/C	230/50	8	950	2700	> 80	320°	Yes	B22
LG125/27E27D/C	230/50	8	950	2700	> 80	320°	Yes	E27
LG125/50B22D/C	230/50	8	1000	5000	> 80	320°	Yes	B22
LG125/50E27D/C	230/50	8	1000	5000	> 80	320°	Yes	E27

OPAL SPHERICAL LG95 - 10W

10 watt dimmable LED SMD opal spherical lamp


OPAL SPHERICAL LG125 - 13W

13 watt dimmable LED SMD opal spherical lamp


Application

Energy efficient LED lamp solutions,
B22 or E27 bases

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body, B22 or E27 lamp bases
- High efficiency SMD LED chips, beam 240°
- Integral trailing edge dimmable LED driver
- Colour temperature, choice of 3000K/6000K, CRI >80
- 1:1 size to traditional spherical lamp, dimmable, suits most spherical lamp fittings
- Double insulation 

Dimensions



Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge








LG95/E27



LG125/B22



LG125/E27



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LG95/830B22	230/50	10	900	3000	> 80	240°	Yes	B22
LG95/860B22	230/50	10	950	6000	> 80	240°	Yes	B22
LG95/830E27	230/50	10	900	3000	> 80	240°	Yes	E27
LG95/860E27	230/50	10	950	6000	> 80	240°	Yes	E27
LG125/830B22	230/50	13	1100	3000	> 80	240°	Yes	B22
LG125/860B22	230/50	13	1200	6000	> 80	240°	Yes	B22
LG125/830E27	230/50	13	1100	3000	> 80	240°	Yes	E27
LG125/860E27	230/50	13	1200	6000	> 80	240°	Yes	E27

OPAL LGS4TC - 4W

4 watt LED SMD GLS style opal lamps

OPAL LGS8TC - 8W

8 watt LED SMD GLS style opal lamps

OPAL LGS10TC - 10W

10 watt LED SMD GLS style opal lamps

Application


Energy efficient LED lamp solutions




LGS4TC/B22

LGS4TC/E27

Design Specifications

- Opal polycarbonate diffuser, beam distribution 200°
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature selectable 2700K/4000K/6000K
- 1:1 size to traditional GLS / A60 lamp, suits most GLS / A60 lamp fittings
- Double insulation 

Dimensions

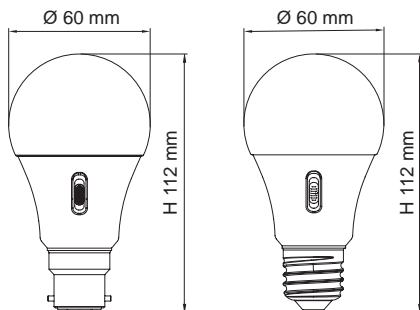

Performance

Dimmable - No





Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LGS4TC/B22	230/50	4	350/400/350	2700/4000/6000	> 80	200°	No	B22
LGS4TC/E27	230/50	4	350/400/350	2700/4000/6000	> 80	200°	No	E27
LGS8TC/B22	230/50	8	700/750/700	2700/4000/6000	> 80	200°	No	B22
LGS8TC/E27	230/50	8	700/750/700	2700/4000/6000	> 80	200°	No	E27
LGS10TC/B22	230/50	10	900/1000/950	2700/4000/6000	> 80	200°	No	B22
LGS10TC/E27	230/50	10	900/1000/950	2700/4000/6000	> 80	200°	No	E27



OPAL DIMMABLE LGS14TC D - 12W

12 watt dimmable LED SMD GLS style opal lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser, beam distribution 200°
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency SMD LED chips, CRI >80
- Integral trailing edge dimmable LED driver
- Colour temperature selectable 2700K/4000K/6000K
- 1:1 size to traditional GLS / A60 lamp, dimmable, suits most GLS / A60 lamp fittings
- Double insulation

Performance

Dimmable Driver - Yes

Dimmer Type - Trailing edge





LGS14TC/B22D



LGS14TC/E27D

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LGS14TC/B22D	230/50	12	1300/1400/1350	2700/4000/6000	> 80	200°	Yes	B22
LGS14TC/E27D	230/50	12	1300/1400/1350	2700/4000/6000	> 80	200°	Yes	E27


LT SERIES LT407TC - 7W

7 watt LED SMD tubular lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80, beam 200°
- Integral non-dimmable LED driver
- Colour temperature selectable 3000K/4000K/6000K
- Suits most CFL lamp fitting, lamp bases B15, B22, E14, E27
- Double insulation 

Performance


Dimmable Driver - Yes

Dimmer Type - Trailing edge



LT407TC/B15 LT407TC/B22 LT407TC/E14 LT407TC/E27

Dimensions

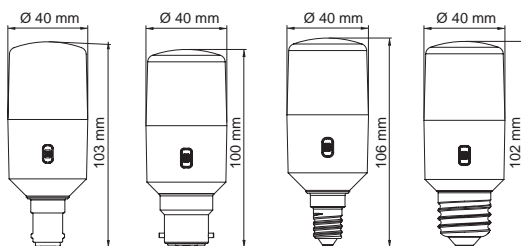

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT407TC/B15	230/50	7	650/700/650	3000/4000/6000	> 80	200°	No	B15
LT407TC/E14	230/50	7	650/700/650	3000/4000/6000	> 80	200°	No	E14
LT407TC/B22	230/50	7	650/700/650	3000/4000/6000	> 80	200°	No	B22
LT407TC/E27	230/50	7	650/700/650	3000/4000/6000	> 80	200°	No	E27


LT SERIES LT409TC - 9W

9 watt non-dimmable LED SMD tubular lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80, beam 200°
- Integral non-dimmable LED driver
- Colour temperature selectable 3000K/4000K/6000K
- Suits most CFL lamp fitting, lamp bases B22, E27
- Double insulation 



LT409TC/B22





LT409TC/E27

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409TC/B22	230/50	9	850/900/850	3000/4000/6000	> 80	200°	No	B22
LT409TC/E27	230/50	9	850/900/850	3000/4000/6000	> 80	200°	No	E27


LT SERIES DIMMABLE LT409TC D - 9W

9 watt dimmable LED SMD
tubular lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80, beam 200°
- Integral dimmable LED driver
- Colour temperature selectable 3000K/4000K/6000K
- Suits most CFL lamp fitting, lamp bases B22, E27
- Double insulation 



LT409TC/B22D





LT409TC/E27D

Performance

Dimmable Driver - Yes
Dimmer Type - Trailing edge

Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LT409TC/B22D	230/50	9	850/900/850	3000/4000/6000	> 80	200°	Yes	B22
LT409TC/E27D	230/50	9	850/900/850	3000/4000/6000	> 80	200°	Yes	E27

LED MR16 TC - 4W/6W

Non-dimmable 4 watt / 6 watt - MR16 profile shape LED, with selectable colour temperature

Application

Ideal for any residential interior space

Design Specifications


- Shockproof frosted polycarbonate lens
- Die-cast aluminium body
- High efficiency SMD LED chips, CRI >80
- Recommended driver is the SAL MINI60
- Beam distribution 38°
- Selectable colour temperature 3000K/4000K/6000K
- Lamp base GU5.3

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
MR16/5W/TC	12V AC/DC	4	360/400/380	3000/4000/6000	> 80	38°	No	GU5.3
MR16/7W/TC	12V AC/DC	6	500/600/550	3000/4000/6000	> 80	38°	No	GU5.3


LED GU10L TC - 4W/6W

High efficiency GU10L TC LED lamps

Application

Energy efficient LED lamp solutions,
ideal for residential luminaires

Design Specifications


- Frosted polycarbonate lens
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable driver, 240V
- Colour temperature selectable 3000K/4000K/6000K
- Beam distribution 50°
- GU10 lamp base
- Double insulation 

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
GU10L350TC	230/50	4	360/400/380	3000/4000/6000	> 80	50°	No	GU10
GU10L550TC	230/50	6	500/600/550	3000/4000/6000	> 80	50°	No	GU10


R SERIES LR50 - 6W

6 watt LED directional R shaped lamps

Application

Energy efficient LED lamp solutions,
E14 lamp base

Design Specifications


- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature, choice of 2700K/6000K
- 1:1 size to traditional R shaped lamp, suits most R lamp fittings
- Double insulation 

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR50WW	230/50	6	430	2700	> 80	120°	No	E14
LR50DL	230/50	6	430	6000	> 80	120°	No	E14

For terms and conditions of catalogue data use, refer to INDEX


R SERIES LR63 - 8W

8 watt LED directional R shaped lamps

Application

Energy efficient LED lamp solutions,
E27 lamp base

Design Specifications


- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature, choice of 2700K/6000K
- 1:1 size to traditional R shaped lamp, suits most R lamp fittings
- Double insulation 

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR63WW	230/50	8	600	2700	> 80	120°	No	E27
LR63DL	230/50	8	600	6000	> 80	120°	No	E27

For terms and conditions of catalogue data use, refer to INDEX


R SERIES LR80 - 9W

9 watt LED directional lamp R shaped lamps

Application

Energy efficient LED lamp solutions
E27 lamp base

Design Specifications


- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature, choice of 2700K/6000K
- 1:1 size to traditional R shaped lamp, suits most R lamp fittings
- Double insulation 

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR80WW	230/50	9	850	2700	> 80	120°	No	E27
LR80DL	230/50	9	850	6000	> 80	120°	No	E27

For terms and conditions of catalogue data use, refer to INDEX


R SERIES LR95 - 9W

9 watt LED directional lamp R shaped lamps

Application

Energy efficient LED lamp solutions,
E27 lamp base

Design Specifications


- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature, choice of 2700K/6000K
- 1:1 size to traditional R shaped lamp, suits most R lamp fittings
- Double insulation 

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LR95WW	230/50	9	850	2700	> 80	120°	No	E27
LR95DL	230/50	9	850	6000	> 80	120°	No	E27

For terms and conditions of catalogue data use, refer to INDEX


LED IP65 LPAR20 - 7W

7 watt PAR20 LED, IP65, E27 lamp base

Application

Perfect for retail and residential spaces

Design Specifications


- Opal polycarbonate diffuser,
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80, beam 100°
- Integral non-dimmable LED driver, E27 lamp base
- Colour temperature, choice of 3000/6000K
- Double insulation 
- Designed for equivalent IP rated PAR floodlights, installed in under covered eave environments

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LPAR20WW	230/50	7	600	3000	> 80	100°	No	E27
LPAR20DL	230/50	7	600	6000	> 80	100°	No	E27

For terms and conditions of catalogue data use, refer to INDEX


LED IP65 LPAR30 - 9W

9 watt PAR30 LED, IP65, E27 lamp base

Application

Perfect for retail and residential spaces

Design Specifications


- Opal polycarbonate diffuser
- Poly covered aluminium body, short neck
- High efficiency SMD LED chips, CRI >80, beam 100°
- Integral non-dimmable LED driver, E27 lamp base
- Colour temperature, choice of 3000/6000K
- Double insulation 
- Designed for equivalent IP rated PAR floodlights, installed in under covered eave environments

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LPAR30WW	230/50	9	800	3000	> 80	100°	No	E27
LPAR30DL	230/50	9	800	6000	> 80	100°	No	E27

For terms and conditions of catalogue data use, refer to INDEX


LED IP65 LPAR38TC - 12W

12 watt PAR38 LED, IP65, E27 lamp base, with selectable colour temperature

Application

Perfect for retail and residential spaces

Design Specifications


- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, CRI >80, beam 100°
- Integral non-dimmable LED driver, E27 lamp base
- Selectable colour temperature, 3000/4000/6000K, CRI >80
- Double insulation 
- Designed for equivalent IP rated PAR floodlights, installed in under covered eave environments

Performance

Dimmable Driver - No



Dimensions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
LPAR38TC	230/50	12	1500/1700/1500	3000/4000/6000	> 80	100°	No	E27


LED G9L - 2.5W

G9 base designed to suit most G9 luminaires

Application

G9L LED lamp, 2.5 watt ideal for feature lighting

Design Specifications

- Opal polycarbonate body profile
- High efficiency SMD LED chips, CRI >80
- 320° optical distribution
- Colour temperature, choice of 3000K/6000K
- Double insulation 

Performance

Dimmable Driver - Optional

Dimmer Type - Trailing edge




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimmable	Lamp Base
G9L3D/WW	230/50	2.5	200	3000	> 80	320°	Optional	G9
G9L3D/DL	230/50	2.5	220	6000	> 80	320°	Optional	G9



Dimensions



SAL **PIXIE** AN AFFORDABLE CHOICE FOR HOME LIGHTING AUTOMATION



PIXIE

NEW ZEALAND LAUNCH 2022

SURFACE SOCKET ESS106

Compact surface socket 250V / 10A rated, compliant to AS/NZS3112:2017

Application


Australian approved electrical accessories, saving installation time and money

Design Specifications

- Compact design to suit a 70mm cut-out
- Australian approved three pin 250V, 10A socket, compliant to AS/NZS3112:2017
- Innovative transparent rear termination inspection cover
- Durable polycarbonate construction
- Designed to suit 1.0mm² to 2.5mm² FLAT twin and earth TPS, for installation by a qualified electrical installer
- Colour white



Dimensions

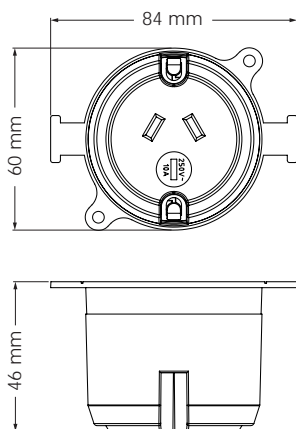

Technical Specifications

Model No.	Input (V)/(Hz)	Max. Loads	Dimensions (D x H mm)	Type	Suitable Cable Conductor
ESS106	250/50	10A	φ 60 x 46	Surface	1mm ² - 2.5mm ² solid or stranded TPS



LED FLOODLIGHTS



STARPAD II SE7171 TC - 15W/100W

15/100 watt IP65 LED floodlight with integral selectable colour temperature

SE7171/15TC




Application

A versatile floodlight solution for residential and commercial exterior spaces

Design Specifications

- Robust die-cast aluminium body, IK07 rated
- Durable black or white powder coat finish
- Textured tempered glass front cover
- High efficiency SMD LED chips, non-dimmable LED driver, CRI >80, CCT selectable 3000K/4000K/5700K
- High performance aluminium reflector, beam distribution 100°
- 600 mm 3 core rubber flex (15-30 watt models), 800mm for (50-100 watt models)

Dimensions

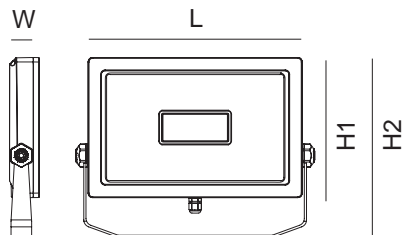

Performance


Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270

SE7171/15TC/WH at 3000K

SE7171/100TC/WH at 3000K

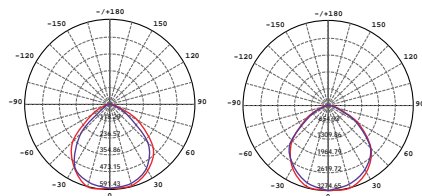

BLACK

WHITE

SE7171/100TC

SE7171/50TC

SE7171/30TC

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Fitting Colour	Dimensions (L x W x H1, H2 mm)	Mass (Kg)
SE7171/15TC/WH	230/50	15	1200/1425/1275	3000/4000/5700	White	177 x 37 x 108, 164	0.63
SE7171/15TC/BK	230/50	15	1200/1425/1275	3000/4000/5700	Black	177 x 37 x 108, 164	0.63
SE7171/30TC/WH	230/50	30	2400/2850/2550	3000/4000/5700	White	217 x 40 x 130, 200	0.87
SE7171/30TC/BK	230/50	30	2400/2850/2550	3000/4000/5700	Black	217 x 40 x 130, 200	0.87
SE7171/50TC/WH	230/50	50	4000/4750/4250	3000/4000/5700	White	270 x 40 x 160, 249	1.35
SE7171/50TC/BK	230/50	50	4000/4750/4250	3000/4000/5700	Black	270 x 40 x 160, 249	1.35
SE7171/100TC/WH	230/50	100	8000/9500/8500	3000/4000/5700	White	330 x 43 x 205, 325	2.05
SE7171/100TC/BK	230/50	100	8000/9500/8500	3000/4000/5700	Black	330 x 43 x 205, 325	2.05

TRADESTAR SE7169 TC - 70W/250W

A versatile LED floodlight range with five models ranging from 70 - 250 watt, now with selectable colour temperature.

Application

Perfect for any exterior space from residential small wattage designs through to high performance commercial applications

Design Specifications

- Integral LED control gear, non-dimmable 70, 100, 150, 200, 250 watt models
- Robust die-cast aluminium body profile with multi-function angled trunnion bracket, colour black
- Pre-wired with 1500mm UV rated flex for easy installation
- IK08, IP65 rated
- CRI >80, CCT 3000/4000/5000K and an impressive 120lm/W optical performance at 4000K
- 100° wide beam distribution

Performance


Dimmable Driver - No



SE7169/70TC



Dimensions

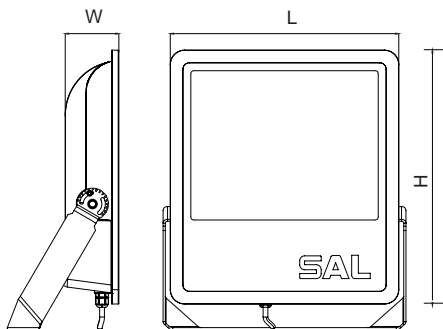


Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7169/70TC/BK at 5000K

SE7169/250TC/BK at 5000K

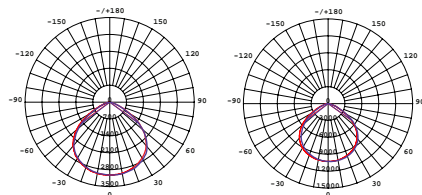



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	Dimensions (L x W x H mm)	Mass (Kg)
SE7169/70TC/BK	230/50	70	7350/8400/7700	3000/4000/5000	210 x 54 x 220	1.9
SE7169/100TC/BK	230/50	100	10500/12000/11000	3000/4000/5000	240 x 70 x 250	2.9
SE7169/150TC/BK	230/50	150	15750/18000/16500	3000/4000/5000	270 x 76 x 300	3.8
SE7169/200TC/BK	230/50	200	21000/24000/22000	3000/4000/5000	310 x 81 x 340	4.9
SE7169/250TC/BK	230/50	250	26250/30000/27500	3000/4000/5000	360 x 92 x 400	7.1

STARGEM III SE7080/1TC - 15W

15 watt IP65 wall mounted LED floodlight with TC selectable colour temperature

STARGEM III SE7080/2TC - 2 X 15W

2 x 15 watt IP65 wall mounted LED floodlight with TC selectable colour temperature

Application

A stylish solution for residential exterior spaces

Design Specifications

- Robust adjustable black or white aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100° per head
- CCT colour selectable 3000K/4000K/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver





SE7080/1TC/WH



SE7080/2TC/BK

Dimensions

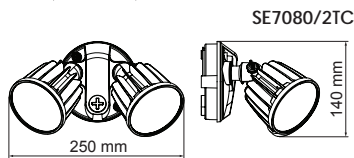

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SE7080/1TC/BK	230/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	Black
SE7080/2TC/BK	230/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	2 x 100°	Black
SE7080/1TC/WH	230/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	White
SE7080/2TC/WH	230/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	2 x 100°	White

STARGEM III SES7080/1TC - 15W

15 watt IP54 wall mounted LED floodlight with TC selectable colour temperature and PIR sensor

STARGEM III SES7080/2TC - 2 X 15W

2 x 15 watt IP54 wall mounted LED floodlight with TC selectable colour temperature and PIR sensor

Application

A stylish solution for residential exterior spaces, great for security

Design Specifications

- Robust adjustable black or white aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100° per head
- CCT colour selectable 3000K/4000K/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver
- Integral PIR motion sensor, detection distance 12m at 2.5m, detection angle 180°, manual over-ride function, time and light level adjustments see installation instructions



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SES7080/1TC/BK	230/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	Black
SES7080/2TC/BK	230/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	2 x 100°	Black
SES7080/1TC/WH	230/50	15	1200/1300/1250	3000/4000/5700	> 80	100°	White
SES7080/2TC/WH	230/50	2 x 15	2 x 1200/1300/1250	3000/4000/5700	> 80	2 x 100°	White




SES7080/1TC/WH




SES7080/2TC/BK

Dimensions



SES7080/1TC



SES7080/2TC



LED WEATHERPROOF





BUNKER 15 OVAL SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

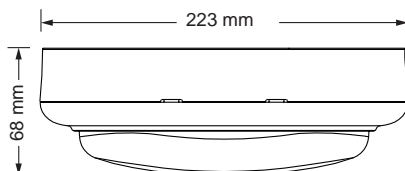


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7271CW/WH at 4000K



Technical Specifications

Model No.	Input (V) / (Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH	230/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK	230/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68

For terms and conditions of catalogue data use, refer to INDEX



BUNKER 15 OVAL SENSOR SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP54 with PIR sensor

Application

A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications


- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON,
- Max. 7 metres detection distance
- Daylight threshold >20 lux
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection

Performance

Dimmable Driver - No




Dimensions

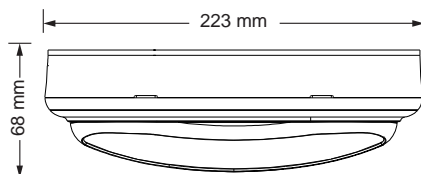

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7271CW/WH/S at 4000K



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (L x W x H mm)
SL7271CW/WH/S	230/50	15	1050	4000	> 80	110°	White	223 x 133 x 68
SL7271CW/BK/S	230/50	15	1050	4000	> 80	110°	Black	223 x 133 x 68



BUNKER 15 ROUND SL7272 - 15W

LED 15 watt surface mount round shaped bunker, IP65

Application


A robust solution for residential and apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection



Dimensions

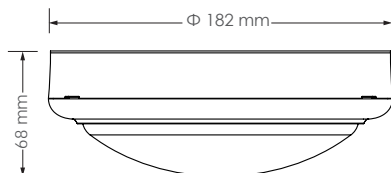


Performance

Dimmable Driver - No

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7272CW/WH at 4000K



Technical Specifications

Model No.	Input (V) / (Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH	230/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK	230/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68

For terms and conditions of catalogue data use, refer to INDEX



BUNKER 15 ROUND SENSOR SL7272 - 15W

LED 15 watt surface mount round shaped bunker,
IP54 with PIR sensor

Application

A robust solution for residential and
apartment interior or exterior utility spaces

Design Specifications

- Durable white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON
- Max. 7 metres detection distance
- Daylight threshold > 20 lux
- CRI >80, 1050lm
- Quick connect installation design
- Robust IK08 protection

Performance

Dimmable Driver - No




Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (D x H mm)
SL7272CW/WH/S	230/50	15	1050	4000	> 80	110°	White	Φ 182 x 68
SL7272CW/BK/S	230/50	15	1050	4000	> 80	110°	Black	Φ 182 x 68




Dimensions

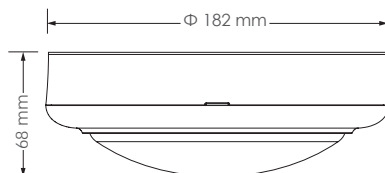

Photometric Data

Unit: cd C0/C180 — C90/C270 —

SL7272CW/WH/S at 4000K





NEW BONDI SL7221GU, SL7222GU

IP65 GU10 architectural wall luminaires,
with GU10 selectable TC lamp included

Application


A decorative residential exterior
or interior solution

Design Specifications

- Aluminium body profile, powder coat black or silver or anodized silver finish
- Clear tempered glass cover
- GU10 lamp base, lamp GU10L350TC included
- Lamp options:
GU10L550TC, GU10LR750, GU10LA750
- SL7221 downward light distribution only
- SL7222 up and down light distribution

Performance


Dimmable - Refer lamp selection



SL7221GU AS

SL7222GU AS

Dimensions

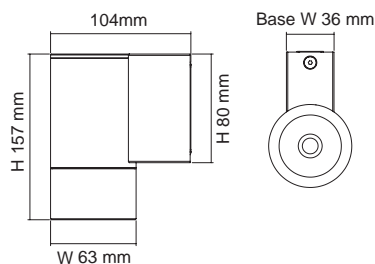

Technical Specifications

Model No.	Input (V)/(Hz)	Fitting Colour	Number of Lamps incl.
SL7221GU AS	230/50	Anodized Silver	1
SL7221GU BK	230/50	Black	1
SL7222GU AS	230/50	Anodized Silver	2
SL7222GU BK	230/50	Black	2



NEW BONDI II SL7223 - 6W, SL7224 - 11W

IP65 LED architectural wall luminaires

Application

A decorative residential exterior
or interior solution

Design Specifications

- Aluminium body profile, powder coat black or silver finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency SMD LED chips
- Integral constant current non-dimmable LED driver
- SL7223 downward light distribution only
- SL7224 up and down light distribution

Performance

Dimmable Driver - No



Technical Specifications


Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour
SL7223WW/BK	230/50	6	400	3000	> 80	38°	Black
SL7223WW/SL	230/50	6	400	3000	> 80	38°	Silver
SL7224WW/BK	230/50	11	2 x 400	3000	> 80	38°	Black
SL7224WW/SL	230/50	11	2 x 400	3000	> 80	38°	Silver



SL7223WW/BK


SL7224WW/BK

Dimensions

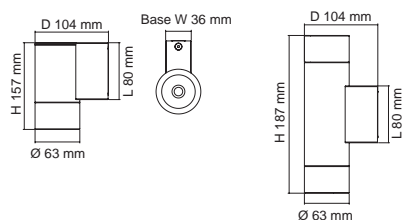

Photometric Data

Unit: cd C0/C180 — C90/C270





TC SELECTABLE COLOUR

DUAL POWER

SOL SL9726 TC/DP - 10W/50W

IP65 LED weatherproof batten
with selectable colour temperature and power

Application

Commercial or industrial utility applications
requiring IP65 and IK08 performance

Design Specifications

- Colour temperature selectable by DIP switch, 3000K/4000K/6000K
- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser and body
- Stainless steel clips & screws
- Integral constant current non-dimmable, dual power LED driver, 10/20, 20/42 or 30/50 watt models
- Product selections compliant to AS/NZS2293 Emergency Lighting & Exit Signs are located in the interior and exterior emergency sections of this catalogue

Performance

Dimmable Driver - Optional
Dimmer Type - Trailing edge,
1-10V, DALI, DSI

In Built Sensor - Optional
Sensor Type - Microwave
Suspension kit - Optional



SL9726/20TC/DP




SL9726/40TC/DP



SL9726/50TC/DP


Dimensions

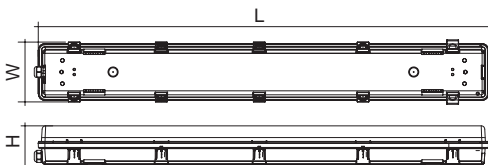


Photometric Data

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270


SL9726/20TC/DP at 3000K




SL9726/40TC/DP at 4000K



SL9726/50TC/DP at 6000K



For terms and conditions of catalogue data use, refer to INDEX

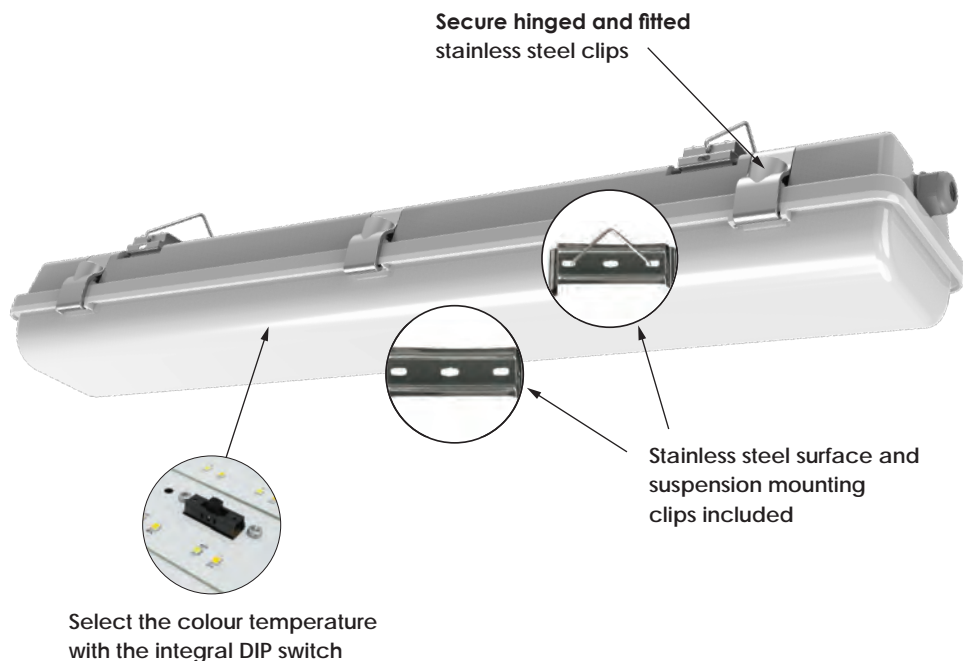

Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions (L x W x H mm)
SL9726/20TC/DP	230/50	$\frac{10}{20}$	$\frac{1110/1190/1170}{2040/2300/2200}$	3000/4000/6000	> 80	120°	642 x 118 x 77
SL9726/40TC/DP	230/50	$\frac{20}{42}$	$\frac{2500/2670/2650}{4370/4990/4720}$	3000/4000/6000	> 80	120°	1251 x 118 x 77
SL9726/50TC/DP	230/50	$\frac{30}{50}$	$\frac{3670/3970/3950}{5480/6070/5920}$	3000/4000/6000	> 80	120°	1551 x 118 x 77



TC SELECTABLE COLOUR

DUAL POWER

MAINTAINED

NON-MAINTAINED

SOL SL9726 TC/EM - 20W/50W

IP65 LED weatherproof batten with selectable colour temperature and power

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Selectable power and colour temperature, 3000/4000/6000K via the DIP switch
- Rounded shape vandal resistant design, robust polycarbonate body and UV stabilized polycarbonate diffuser and body
- Stainless steel clips & screws
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology

Performance

Dimmable Driver - Optional
Suspension Kits - Optional




SL9726/20TC/EM

SL9726/40TC/EM

SL9726/50TC/EM


Dimensions

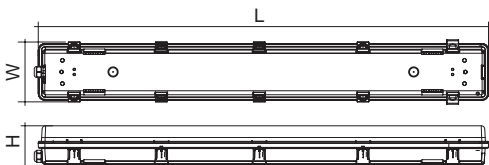


Photometric Data (at maintained power)

Unit: cd C0/C180 — C30/C210 —
C60/C240 — C90/C270 —


SL9726/20TC/EM at 3000K




SL9726/40TC/EM at 4000K



SL9726/50TC/EM at 6000K



For terms and conditions of catalogue data use, refer to INDEX

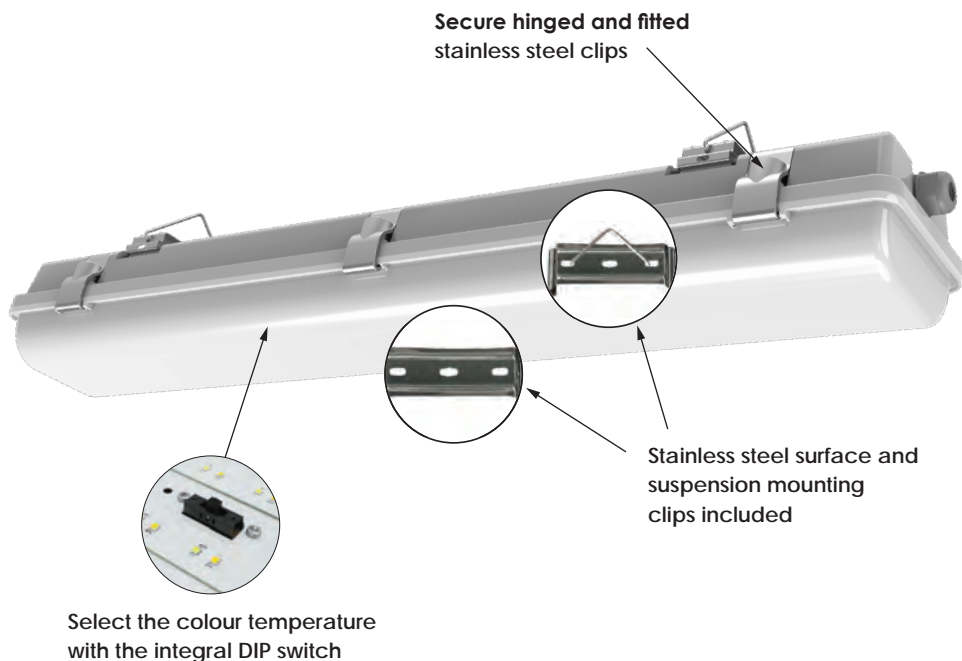

Technical Specifications

Model No.	Input (V)/(Hz)	Maintained Power (W)	Emergency Classification	Battery Type	Lumens at Maint. PWR	Dimensions (L x W x H mm)
SL9726/20TC/EM	230/50	$\frac{10}{20}$	D32@C0, D25@C90	IFR18650 6.4V 1500mAh	1110/1190/1170 2040/2300/2200	642 x 118 x 77
SL9726/40TC/EM	230/50	$\frac{20}{42}$	D40@C0, D40@C90		2500/2670/2650 4370/4990/4720	1251 x 118 x 77
SL9726/50TC/EM	230/50	$\frac{30}{50}$	D40@C0, D32@C90		3670/3970/3950 5480/6070/5920	1551 x 118 x 77

	PAGE
ALBANY S9514TC WH	33
BENNY SL2106 TC	44
BLADE SL9707 TC	53
BLADE SL9709 TC	55
BONDI II SL7223GU, SL7224GU	122
BONDI SL7221GU, SL7222GU	121
BUNKER 15 OVAL SENSOR SL7271	118
BUNKER 15 ROUND SENSOR SL7272	120
BUNKER 15 OVAL SL7271	117
BUNKER 15 ROUND SL7272	119
CANDLE CLEAR DIM LCA	77
CANDLE OPAL DIM LCA	78
CLEAR SPHERICAL LG95/LG125	85
CLEAR DIM LG5	73
CLEAR DIM LG9	74
DISC SL2105 TC	43
ECOLINE SL9732 EM	46
ECOLINE SL9732 TC/DP2	47
ECOSTAR II FIXED S9145TC/WH	21
ECOSTAR II GIMBAL S9146TC/WH	22
EXMOUTH S9522TC WH	34
EXMOUTH S9523TC WH	35
FANCY ROUND CLEAR DIM LFR	79
FANCY ROUND OPAL DIM LFR	80
FIREFOX S9902F/120-S9053TCP	36
FLP12V5M/RGB	68
FLP12V2M/S	69
FLP12V5M/S	70
S-FM SURFACE MT FRAME	61
FRISBEE SL2104 TC/DP	41

	PAGE
G9L DIMMABLE	104
LED GU10L TC	96
LED IP65 LPAR20	101
LED IP65 LPAR30	102
LED IP65 LPAR38TC	103
LT SERIES DIM LT409TC D	94
LT SERIES LT407TC	92
LT SERIES LT409TC	93
TUBULAR CLEAR LT25 & LP25	81
LED MR16 TC	95
OPAL DIM LGS14TC D	91
OPAL DIM LG5	75
OPAL DIM LG9	76
OPAL LGS4TC/LGS8TC/LGS10TC	89
OPAL SO3700 TC/DP	38
OPAL II SO3800 TC	39
OPAL II SO3800 TC/EM	40
OPAL SPHERICAL DIM LG95/LG125	87
PANEL S9784 TC/DP	57
PANEL S9784U TC/DP	59
PREMIER S9072TC WH	27
PREMIER S9073TC/WH/DP	28
PREMIER S9074TC/WH/DP	29
PREMIER S9075TC/WH/DP	30
PREMIER S9076TC/WH/DP	31
R SERIES LR50	97
R SERIES LR63	98
R SERIES LR80	99
R SERIES LR95	100
METRIC FRAME S9704	62

	PAGE
SOL SL9726 TC/EM	125
SLIMLINE SEAMLESS SL9706 TC	51
SOL SL9726 TC/DP	123
STARGEM III SE7080 TC	113
STARGEM III SES7080 TC	114
STARPAD SE7171 TC	109
SURFACE SOCKET ESS106	106
TRADEGEM S9140TC/WH	17
TRADEGEM S9141TC/WH	19
TRADEGEM S9141TC/WH/SM	20
TRADESTAR SE7169 TC	111
LED TUBE LT8 TC	84
UFO II SHB25HE	65
UNIFIT S9006TC	23
UNIFIT S9007TC	24
UNIFIT S9008TC	25
UNIFIT S9009TC	26
VINTAGE DECO LST21	83
VINTAGE LST21FD & SPHERICAL LG125FD	82
WAVE S9064TC WH	11
WAVE S9064TC/WH/T	12
WAVE S9065TC WH	13
WAVE S9065TC/WH/T	14
WAVE S9066TC WH	15
WAVE S9066TC/WH/T	16
WIDELINE S9733L TC	49

Terms and conditions of catalogue data use:

1. Copyright SAL National Pty Ltd 2021
2. Compliances, installation and operations reflect product use in the region of Australia and New Zealand for products listed on www.sal.co.nz.
3. All data and images contained within remain the property of SAL National Pty Ltd, or as acknowledged by the provider.
4. Trademarks shown remain the property of the relevant brand, company or third party.
5. Images, tones and finishes shown are for guidance only and may vary from the actual product, which if critical to the installation must be confirmed at order placement.
6. Due to continued product specification, standards and information updates, product data sourced from this document shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order.
7. For INTERIOR products, the designated IP rating is "from below the ceiling" unless otherwise specified.
8. SAL products are designed in accordance with all relevant and mandatory International and AUS/NZS Standards, which require installation by a qualified installer in accordance AS/NZS3000 and the manufacturers installation instructions, which require regular cleaning and maintenance of the equipment.
9. Product sales arising from this publication are sold in accordance with SAL standard terms and conditions of sale, available via www.sal.co.nz where relevant.
10. Due to continued product and regulative developments, validation of ANY sustainable rebate program product accreditation, must be confirmed prior to purchase via the relevant authority's web site.



Delivering Certainty



Delivering Certainty



Exclusive New Zealand Distributor

 www.sal.co.nz, www.hamer.co.nz

 sales@hamer.co.nz

 0800 239 239

Auckland

 130 Bush Road, Albany, Auckland 0632

Christchurch

 27 Dalziel Place, Woolston, Christchurch 8023



Linked  YouTube



SMARTER LIGHTING CHOICES