



NZ PRODUCT CATALOGUE

June 2024

INDEX	PAGE
Domestic Down-Lights	2 & 3
Commercial Down-Lights	4
Spotlight	5
Oyster Commercial	5 & 6
Battens Commercial	6 & 7
Panels Commercial	8 & 9
High-Bay Commercial	10
Bulkhead	11
Spot Lights	11
Under Verandah	12
Floodlights	13
Emergency	13 & 14
GSP Lamps	15 & 16
Candle Lamps	17
Fancy Round Lamps	18
GU10 Lamps	19
MR16 Lamps	9 & 20
G95 Lamps	20
G125 Lamps	
Tubular Lamps	21
Pilot Lamps	21
Tube Lamps	22
Lamp Interior	23

WAVE S9065TCWH - 8W

Dimmable IP44 LED down-light with selectable colour temperature

Application: Ideal for any residential or commercial interior space

SPECIFICATIONS

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC-F rated
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable
- LED driver, with flex & plug
- High-efficiency SMD LED chips



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9065TCWH	S9065TCWH	LED D/L 8W IP44 3/4/6K WH DIM	8	800/950/850	3000/4000/5700	90°	80	113 x 59	92	\$21.11

WAVE S9064TCWH-T - 7W

Dimmable IP44 LED down-light with selectable colour temperature

Application: Ideal for any residential or commercial interior space

SPECIFICATIONS

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC-F rated
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with terminal block
- High-efficiency SMD LED chips



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9064TCWH-T	S9064TCWH-T	LED D/L 7W IP44 3/4/6K WH DIM	7	750/850/800	3000/4000/5700	90°	80	95 x 58	72	\$21.49

WAVE S9065TCWH-T - 8W

Dimmable IP44 LED down-light with selectable colour temperature

Application: Ideal for any residential or commercial interior space

SPECIFICATIONS

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC-F rated
- Quality opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with terminal block
- High-efficiency SMD LED chips



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9065TCWH-T	S9065TCWH-T	LED D/L 8W IP44 3/4/6K WH DIM	8	800/950/850	3000/4000/5700	90°	80	113 x 59	92	\$18.09

DOMESTIC DOWN-LIGHTS



WAVE S9066TCWH-T - 12W

Dimmable IP44 LED down-light with selectable colour temperature

Application: Ideal for any residential or commercial interior space

SPECIFICATIONS

- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC-F rated
- Quality opal polycarbonate diffuser
- The integral constant current trailing edge dimmable LED driver with terminal block
- High-efficiency SMD LED chips



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9066TCWH-T	S9066TCWH-T	LED D/L 12W IP44 3/4/5.7K WH DIM	230/50	12	1300/1450/1350	3000/4000/5700	90°	80	145 x 66	125	\$30.71



PREMIER S9072TC - 14W

Dimmable IP64 14W LED down-light with selectable colour

Application: Ideal for any residential or commercial interior space

SPECIFICATIONS

- Premium aluminium body profile, IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current trailing edge dimmable LED driver, with flex & plug
- Dimming options: 1-10v analogue, DALI, DSI



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9072TCWH	S9072TCWH	LED D/L 14W IP64 3/4/5.7K DIM WH	230/50	12	1000/1150/1150	3000/4000/5700	90°	80	143 x 61	118	\$49.50



PREMIER S9073TC/DP - 13/18W

Dimmable IP64 , 18W LED down-light with selectable colour temperature & power

Application: Ideal for any commercial interior space looking for an economical lighting choice

SPECIFICATIONS

- Premium aluminium body profile, IC-F rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current trailing edge dimmable LED driver, with flex & plug



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9073TC-WH-DP	S9073TC-WH-DP	LED D/L 13/18W IP64 3/4/5.7K DIM WH DP	230/50	13/18	1500/1800/1600	3000/4000/5700	90°	80	165 x 61	135	\$67.95

PREMIER S9074TC/DP - 15W/20W

IP64 DUAL POWER 15/20W LED non-dimmable down-light with selectable colour temperature

Application: Ideal for any commercial interior spaces looking for an economical lighting choice & design flexibility

SPECIFICATIONS

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current non-dimmable LED driver, with flex & plug & integral dual power 15W/20W selections



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9074TC-WH-DP	S9074TC/WH/DP	LED D/L 15/20W IP64 3/4/5.7K WH/DP	15/20	1600/1900/1700	3000/4000/5700	90°	80	200 x 68	160	\$77.00

PREMIER S9075TC/DP - 23W/30W

IP64 23W/30W LED down-light with selectable colour temperature & power

Application: Ideal for any commercial interior space requiring flexibility in power selections

SPECIFICATIONS

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Remote constant current non-dimmable LED driver, with flex & plug



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9075TC-WH-DP	S9075TC/WH/DP	LED D/L 23/30W IP64 3/4/5.7K WH DP	23/30	2600/3100/2800	3000/4000/5700	90°	80	230 x 75	195	\$88.65

PREMIER S9076TC/DP - 30W/40W

Non-dimmable IP64, 30W/40W LED down-light with selectable colour temperature & power

Application: Ideal for any commercial interior space

SPECIFICATIONS

- Premium aluminium body profile, CA90 rated
- Stylish white powder coat finish
- Quality opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current remote non-dimmable LED driver, with flex & plug
- Dimmer Type - 1V~10V, DALI / DSI - trailing edge
- Dual Power



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Cut-Out (mm)	Trade Price
S9076TC-WH-DP	S9076TC/WH/DP	LED D/L 30/40W IP64 3/4/5.7K WH DP	30/40	3200/4200/3800	3000/4000/5700	90°	80	280 x 95	240	\$99.45



ALBANY S9514TC - 28W/36W

Recessed LED rectangular Spotlight with selectable colour temperature & power.

Application: Ideal for any retail or commercial interior space.

SPECIFICATIONS

- Easy selectable colour temperature with an inbuilt DIP switch, 3K, 4K, 5.5K
- Twin 28W/ 6W setting with the integral DIP switch
- Adjustable up to 60°, IC-F rated
- Constant current non-dimmable LED driver, complete with flex & plug
- Stylish white powder coat finish
- High efficiency SMD LED chips
- Dimmer driver optional
- Rated IP20
- Cut-out (LxW): 215mm x 130mm



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
S9514TCWH	S9514TC WH	LED D/L 28/36W ADJ. 3/4/5.5K WH	240	28/36	2800/3600	3000/4000/6000	90°	80	228 x 144 x 115	\$149.15



FRISBEE SL2104TC-DP - 8W/25W

Low profile recessed or surface mount oyster with selectable colour temperature & power

Application: A creative design for residential or commercial spaces

SPECIFICATIONS

- Low profile design
- Durable white polyamide body profile with an opal polycarbonate diffuser
- High efficiency SMD LED chips, choice of selectable power 8/12W, 12/18W, 18/25W & colour temperature 3000K/4000K/6000K
- Integral constant current non-dimmable driver
- Flexible cut-out sizes to suit retrofit recessed applications - SL2104/18TC 80-100mm, SL2104/22TC 120-200mm, SL2104/30TC 150-270mm
- Double insulation, IC-4 rated



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Trade Price
SL2104-18TC-DP	SL2104/18TC/DP	LED Oyster 8/12W TRI Colour WH	8/12	780/840/840	3000/4000/6000	110°	80	180 x 21	\$48.52
SL2104-22TC-DP	SL2104/22TC/DP	LED Oyster 12/18W TRI Colour WH	12/18	1260/1350/1350	3000/4000/6000	110°	80	220 x 21	\$64.70
SL2104-30TC-DP	SL2104/30TC/DP	LED Oyster 18/25W TRI Colour WH	18/25	1875/2000/2000	3000/4000/6000	110°	80	300 x 25	\$87.86


BENNY SL2106TC - 10W/24W

IP65 LED Oyster with selectable colour temperature 3000K/4000K/6000K

Application: A perfect choice for apartments or commercial spaces

SPECIFICATIONS

- Easy selectable colour temperature with the integral DIP switch
- Durable polycarbonate body profile with opal polycarbonate diffuser, colour white
- Rugged IK08 construction
- High efficiency SMD LED chips, CRI >80
- Integral sensor models available to order
- Double insulation
- UV-resistant opal diffuser
- Non-dimmable
- Rated IP65



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Colour	CRI	Dim WxH (mm)	Trade Price
SL2106-20TC	SL2106/20TC	LED Oyster 10W TRI Colour WH	10	800	3000/4000/6000	White	80	220 x 65	\$57.38
SL2106-30TC	SL2106/30TC	LED Oyster 20W TRI Colour WH	20	1600	3000/4000/6000	White	80	280 x 71	\$87.71
SL2106-40TC	SL2106/40TC	LED Oyster 24W TRI Colour WH	24	2000	3000/4000/6000	White	80	350 x 81	\$123.07

ECOLINE MKII SL9732 - 12W/50W

LED narrow diffused batten with selectable colour temperature & dual power

Application: Conventional linear LED batten products for commercial service spaces

SPECIFICATIONS

- 65mm narrow steel body
- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block, easy installation
- Selected models as listed below are designed with selectable colour temperature with an integral DIP switch 3000K/4000K/5700K & selectable power
- High efficiency SMD LED chips, CRI >80, 120° beam distribution
- Integral constant current non-dimmable LED driver 20W & 40W models, emergency options available compliant to AS/NZS2293



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
SL9732-20TC-DP2	SL9732/20TC/DP2	Led Diffused Bat	12/20	2465/2650/2670	3000/4000/5700	120°	80	600 x 65 x 65	\$52.99
SL9732-40TC-DP2	SL9732/40TC/DP2	Led Diffused Bat	24/40	4800/5180/5230	3000/4000/5700	120°	80	1135 x 65 x 65	\$83.54
SL9732-50TC-DP2	SL9732/50TC/DP2	Led Diffused Bat	30/50	5910/6270/6330	3000/4000/5700	120°	80	1455 x 65 x 65	\$101.73

ECOLINE EMERGENCY SL9732EM - 50W

Compliant to AS/NZS 2293, narrow body profile

Application: Perfect for interior commercial emergency lighting installations

SPECIFICATIONS

- Narrow steel body (65mm) body profile, white powder coat finish
- Designed with a large terminal block for easy installation
- LiFePO4 battery technology for long life
- Designed for both maintained & non-maintained systems, guaranteed 90 minutes emergency function LED charge status display & test switch
- High efficiency SMD LED chips on board
- Selectable colour temperature DIP switch, 3000K / 4000K / 5700K & integral dual power selections



Code	Cat#	Description	Power (W)	CRI	Dim LxWxH (mm)	Trade Price
SL9732-40TCEM	SL9732/40EM	LED EMG Diffused Bat 1135mm x 65mm	40	80	1135 x 65 x 65	\$224.33
SL9732-50TCEM	SL9732/50EM	LED EMG Diffused Bat 1455mm x 65mm	50	80	1455 x 65 x 65	\$270.67

SLIMLINE SL9706 - 4W/22W

Tri-Colour Batten Seamless SLIMLINE

Application: Great for commercial shop spaces, home pantries, walk-in wardrobes

SPECIFICATIONS

- Selectable colour temperature 3000K/4000K/5500K, beam distribution 105°, CRI >80
- Polycarbonate body profile & opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug & play flex & plug included
- Max. Connections: 280TC 55, 540TC 25, 840TC 17, 1140TC 12, 1440TC 10 Units
- Rated IP20



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
SL9706-280TC	SL9706/280TC	Seamless linkable batten	4	300/380/300	3000/4000/5500	105°	80	280 x 23 x 36	\$35.65
SL9706-540TC	SL9706/540TC	Seamless linkable batten	9	750/800/750	3000/4000/5500	105°	80	540 x 23 x 36	\$49.08
SL9706-840TC	SL9706/840TC	Seamless linkable batten	13	1050/1200/1050	3000/4000/5500	105°	80	840 x 23 x 36	\$56.87
SL9706-1140TC	SL9706/1140TC	Seamless linkable batten	18	1550/1600/1600	3000/4000/5500	105°	80	1140 x 23 x 36	\$65.02
SL9706-1440TC	SL9706/1440TC	Seamless linkable batten	22	1800/2000/1800	3000/4000/5500	105°	50	1440 x 23 x 36	\$93.56
SL9706-32CMLINK	SL9706/32CMLINK	Cable Link						320mm	\$4.92
SL9706-76CMLINK	SL9706/76CMLINK	Cable Link						760mm	\$5.68

PANEL S9784TC/DP - 20W/40W

20W & 30W LED High performance BACKLIT panel

Application: Designed for commercial & office space lighting tasks.

SPECIFICATIONS

- Integral selectable power
- Easy selectable colour temperature with an integral DIP switch, 3000K/4000K/5700K
- Quality white powder coated finish
- High efficiency SMD LED chips, CRI >80
- Remote constant current non-dimmable LED driver, complete with flex & plug
- Suspended wire kits unavailable for this series
- UGR <19 range available



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
S9784-606TC-DP	S9784/606TC/DP	LED PANEL 595 x 595 x 33mm	16/27	2750/3200/3000	3000/4000/5700	110°	80	595 x 595 x 33	\$110.00
S9784-312TC-DP	S9784/312TC/DP	LED PANEL 1195 x 295 x 33mm	16/27	2750/3050/2900	3000/4000/5700	110°	80	1195 x 295 x 33	\$109.82
S9784-612TC-DP	S9784/612TC/DP	LED PANEL 1195 x 595 x 32mm	24/40	4500/4750/4600	3000/4000/5700	110°	80	1195 x 595 x 32	\$165.60

PANEL S9784U TC/DP - 16W/40W

LED High performance panel with selectable colour temperature & power

Application: Designed for commercial & office space lighting tasks.

SPECIFICATIONS

- UGR <19 performance
- Rated IP44
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- Flicker CONTROLLED, remote constant current non-dimmable LED driver, complete with flex & plug
- Dimmer driver optional
- Dimmer type - Trailing Edge 1V~10V, DALI/DSI
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5000K, Suspended wire kits available, Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
S9784U606TC-DP	S9784/606TC/DP	LED PANEL 595 x 595 x 33mm	16/27	2750/3200/3000	3000/4000/5000	80°	80	595 x 595 x 32	\$124.66
S9784U312TC-DP	S9784U312TC/DP	LED PANEL 1195 x 295 x 32mm	16/27	2700/2850/2750	3000/4000/5000	80°	80	1195 x 295 x 32	\$122.00
S9784U612TC-DP	S9784U612TC/DP	LED PANEL 1195 x 595 x 32mm	24/40	4500/4750/4600	3000/4000/5000	80°	80	1195 x 595 x 32	\$179.93

RECESSED CEILING FRAME S9704

LED panel installation type recessed ceiling frame

Application: Designed for commercial office interior spaces

SPECIFICATIONS

- Pressed steel base designed for (metric sizes)
- Quality white powder coated finish



Code	Cat#	Description	Colour	Dim WxH (mm)	Trade Price
S9704-228FRAME	S9704/228FRAME	Suitable for S9784/312 range	WHITE	310 x 1210	\$79.66
S9704-328FRAME	S9704/328FRAME	Suitable for S9784/612 range	WHITE	610 x 1210	\$129.76
S9704-414FRAME	S9704/414FRAME	Suitable for S9784/606 range	WHITE	610 x 610	\$92.61

SURFACE MOUNTED FRAME S-FM

LED panel installation type S-FM surface mounted frame

Application: Designed for commercial interior office spaces

SPECIFICATIONS

- Pressed steel base
- Quality powder coated finish
- Accommodates ESS101 quick connect surface mount socket, excluding BACKLIT panels
- For S312FM & S606FM add the suffix /P or /P2 to the order code, for kit form assemblies supplied ready for easy assembly on site.



Code	Cat#	Description	Colour	Dim LxWxH (mm)	Trade Price
S312FM-P2	S312FM/P2	SURFACE MOUNTED FRAME 312 SIZE KIT FORM	WHITE	1200 x 358 x 65	\$84.29
S606FM-P2	S606FM/P2	SURFACE MOUNTED FRAME 606 SIZE KIT FORM	WHITE	600 x 658 x 65	\$73.96
S612FM-P2	S612FM/P2	SURFACE MOUNTED FRAME 612 SIZE KIT FORM	WHITE	1200 x 658 x 65	\$104.55



UFO III SHB27/150W

Non-Dimmable, IP65 LED UFO low profile, high-bay

Application: Ideal for any commercial or industrial interior space

SPECIFICATIONS

- Slim-line, low profile die-cast, aluminium body
- Powder coated finish
- High efficiency LED optics
- Clear tempered glass lens, 120° beam distribution
- Integral non-dimmable LED driver with 4KV surge protection
- IP65, IK06 rated, complete with flex & plug for easy installation



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim H (mm)	Trade Price
SHB27/150W	SHB27/150W	UFO III 150w IP65 LED Low Profile High-bay	230	150	17300	4000	120°	80	91	\$170.00



UFO SHB23MP TC - 80W/200W

Multi-purpose, 1-10V dimmable IP65 LED high-bay or low-bay with selectable CCT & power.

Application: Versatile LED high-bay or low-bay, ideal for commercial & industrial applications

SPECIFICATIONS

- Integral selectable power & CCT 3000K / 4000K / 5000K
- Robust, low profile die-cast aluminium IP65/IK08 body profile.
- High efficiency LED optics, with an impressive > 140lm/W performance at 150W/200W @ 4000K, CRI >80, 90° beam distribution, polycarbonate lens
- Integral 1V~10V dimmable LED driver, complete with flex & plug for easy installation
- Power/lumen settings at:
 - » 3000K : 100W/13000lm, 150W/18000lm, 200W/22000lm,
 - » 4000K : 100W/14500lm, 150W/21000lm, 200W/26000lm,
 - » 5000K : 100W/14000lm, 150W/19500lm, 200W/24000lm.



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	CRI	Dim WxH (mm)	Trade Price
SHB23MP200TC	SHB23MP200TC	UFO multi-purpose High-bay	100/150/200	14500/21000/26000	3000/4000/5000	80	300 x 192	\$332.50



UFO II SHB25HE - 80W/120W

Dimmable 1V~10V, IP65 LED multi function high-bay or low-bay

Application: Ideal for any commercial or industrial interior space

SPECIFICATIONS

- Multi-function high-bay or low-bay
- Die-cast aluminium body, black powder coat finish
- High efficiency SMD LED optics
- Clear polycarbonate lens, 120° lens
- Integral 1-10V dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex & plug for easy installation



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim WxH (mm)	Trade Price
SHB25HE120	SHB25HE120	UFO multi-purpose High-bay	120	18000	4000	120°	80	271 x 183	\$287.09

BULKHEAD / SPOTS



BRONX SE7089 - 55W

IP65 LED wall mount luminaire, IK10 rated

Application: A robust solution for commercial exterior spaces & security

SPECIFICATIONS

- Die-cast aluminium body
- Durable black powder-coated finish
- UV stabilised opal polycarbonate diffuser
- High-efficiency SMD LED chips
- Integral constant current non-dimmable LED driver, pre-wired with 450mm of 3x core rubber flex
- Built-in sensor optional



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	CRI	Dim LxWxH (mm)	Trade Price
SE7089BK	SE7089BK	LED Bunker 55W IP65 5K Black	55	4500	5000	70	265 x 190 x 301	\$283.79



STARGEM III SES7080/1TC - 15W

15W IP54 wall mounted LED floodlight with selectable colour temperature & PIR sensor

Application: A stylish solution for residential exterior spaces, great for security

SPECIFICATIONS

- Robust adjustable black or white aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100°, TC colour selectable 3000K/4000K/5700K, High efficiency SMD LED chips, integral non-dimmable LED driver
- Integral PIR motion sensor, detection distance 12m@2.5hm, detection angle 180°, manual over-ride function, time & light level adjustments see installation instructions.



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Mass (kg)	Trade Price
SES7080-1TC-BK	SES7080/1TC/BK	LED F/Light 15W IP54 TC Sensor BK	15	1200/1300/1250	3000/4000/5700	100°	80	0.4	\$69.84
SES7080-1TC-WH	SES7080/1TC/WH	LED F/Light 15W IP54 TC Sensor WH	15	1200/1300/1250	3000/4000/5700	100°	80	0.4	\$69.84

STARGEM III SES7080/2TC - 2X 15W

2x 15W IP54 wall mounted LED floodlight selectable colour temperature & PIR sensor

Application: A stylish solution for residential exterior spaces, great for security

SPECIFICATIONS

- Robust adjustable black or white aluminium optical head assembly
- Durable polycarbonate mounting base
- Opal polycarbonate diffuser, beam distribution 100°, TC colour selectable 3000K/4000K/5700K
- High efficiency SMD LED chips, integral non-dimmable LED driver
- Integral PIR motion sensor, detection distance 12m@2.5hm, detection angle 180°, manual over-ride function, time & light level adjustments see installation instruction



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Mass (kg)	Trade Price
SES7080-2TC-BK	SES7080/2TC/BK	LED F/Light 2 x 15W IP54 TC Sensor BK	2x 15	2400/2600/2500	3000/4000/5700	2x 100°	80	0.4	\$88.54
SES7080-2TC-WH	SES7080/2TC/WH	LED F/Light 2 x 15W IP54 TC Sensor WH	2x 15	2400/2600/2500	3000/4000/5700	2x 100°	80	0.4	\$88.54

SOL SL9726TC / DP - 10W/50W

IP65 LED Dual Power weatherproof batten with selectable colour temperature & power

Application: Commercial or industrial utility applications requiring IP65 & IK08 performance.

SPECIFICATIONS

- Colour temperature selectable by DIP switch, 3000K / 4000K / 6000K
- Rounded profile design, robust polycarbonate body & UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable, Dual Power LED driver, 10W/20W or 20W/42W models. Stand-By options have fixed driver power.
- Product selections compliant to AS/NZS2293 Emergency Lighting
- Optional dimmable driver
- Dimmable type: Tailing edge, 1V~10V, DALI, DSI
- Accessories included - PVC cable glands & suspension brackets.
- Installation types - Surface mount (standard) or if Suspended (a suspension kit is required).



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
SL9726-40TC-DP	SL9726/40TC/DP	Weatherproof 1251mm IP65 20/42W TC DP	20/42	4370/4990/4720	3000/4000/6000	120°	80	1251 x 118 x 77	\$98.95
SL9726-50TC-DP	SL9726/50TC/DP	Weatherproof 1551mm IP65 30/50W TC DP	30/50	5480/6070/5920	3000/4000/6000	120°	80	1551 x 118 x 77	\$133.64

SOL SL9726TC/EM - 20W/50W

Maintained emergency, IP65 LED weatherproof batten with selectable colour

Application: Commercial or industrial utility applications requiring IP65 & IK08 performance

SPECIFICATIONS

- Colour temperature selectable by DIP switch, 3000K / 4000K / 6000K
- Rounded shape vandal proof design, robust polycarbonate body & UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology.
- Emergency classification (20W) D32@C0, D20@C90, (40W) D40@C0, D20@C90
- Accessories included - PVC cable glands & suspension brackets.
- Installation types - Surface mount (standard) or if Suspended (a suspension kit is required).



Code	Cat#	Description	Power (W)	Lumen (lm)	CRI	Dim LxWxH (mm)	Trade Price
SL9726-40TC-EM	SL9726/40TC/EM	Weatherproof 40W TC IP65 EM	20/42	4370/4990/4720	80	1251 x 118 x 77	\$253.65
SL9726-50TC-EM	SL9726/50TC/EM	Weatherproof 1551mm IP65 30/50W TC EM	30/50	5480/6070/5920	80	1551 x 118 x 77	\$302.90

FLOODLIGHTS / EMERGENCY

STARPAD II SE7071TC2 - 15W/100W

15W/100W IP65 LED floodlight with selectable CCT

Application: A versatile floodlight solution for residential & commercial exterior spaces

SPECIFICATIONS

- Robust die-cast aluminium body, IK07 rated
- Durable black powder coated finish
- Textured, tempered glass front cover
- High efficiency LED optics, CRI >80, selectable CCT 3000K/4000K/5000K
- Non-dimmable LED driver, high performance aluminium reflector, beam distribution 110°
- Nickel plated copper cable gland with 600mm, 3 core rubber flex (15W-30W models), 800mm for (50W-100W models)



Code	Cat#	Description	Power (W)	Lumen (lm)	CCT (K)	Beam Angle	CRI	Dim LxWxH (mm)	Trade Price
SE7071-15TC2BK	SE7071/15TC2BK	STARPAD II Floodlight with selectable CCT, 15W	15	1575/1800/1650	3000/4000/5000	110°	80	153 x 99 x 36	\$48.04
SE7071-30TC2BK	SE7071/30TC2BK	STARPAD II Floodlight with selectable CCT, 30W	30	3150/3600/3300	3000/4000/5000	110°	80	207 x 135 x 36	\$71.28
SE7071-50TC2BK	SE7071/50TC2BK	STARPAD II Floodlight with selectable CCT, 50W	50	5250/6000/5500	3000/4000/5000	110°	80	261 x 171 x 39	\$96.08
SE7071-100TC2-BK	SE7071/100TC2/BK	STARPAD II Floodlight with selectable CCT, 100W	100	10500/12000/11000	3000/4000/5000	110°	80	343 x 200 x 42	\$185.64

EMERGENCY EXIT SELK1500EX3 - 2.8W


Application: A perfect choice for apartments or commercial spaces

SPECIFICATIONS

- Compliant to AS/NZS 2293, emergency lighting with a viewing distance of 24 metres
- Polycarbonate body profile, IP20, integral 2.8W emergency control gear with long life Lithium battery technology
- Multi-directional decals included
- Versatile design to allow ceiling or wall mount installation, with quick connect removable decal housing.
- Guaranteed 90 minutes emergency function
- Optional recessed mounting (SELK1500EX3RCP) & SELF-TEST systems available



Code	Cat#	Description	Power (W)	CRI	Body Colour	Dim LxWxH (mm)	Trade Price
SELK1500EX3	SELK1500EX3	Blade Emergency EXIT, 24m viewing	2.8	80	WHITE	310 x 62 x 213	\$149.90
SELK1500EX3RCP/WH	SELK1500EX3RCP/WH		2.8	80	WHITE	345 x 117 x 58	\$40.00

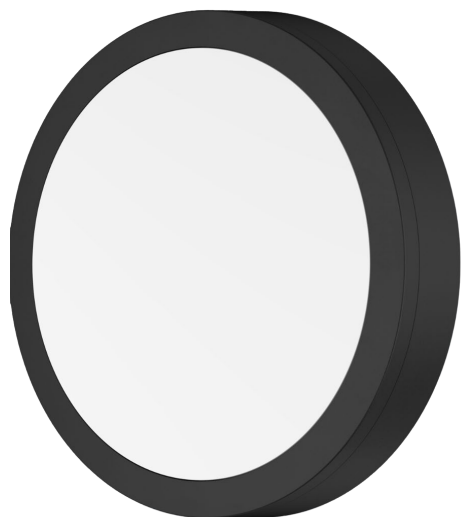

COOPER III SE7192TC - 18W

MAINTAINED OR NON-MAINTAINED, decorative, vandal resistant 18W round profile, LED wall or ceiling mount luminaire, IK10 with selectable CCT, IP65

Application: A decorative architectural solution for residential & commercial interior or exterior spaces

SPECIFICATIONS

- Selectable CCT 3000K/4000K/5700K
- Stylish black finish, integral non-dimmable control gear, 18W
- Robust PC body profile & diffuser
- High efficiency LED optics
- Compliant to AS/NZS 2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology. Emergency spacing classification D20@C0
- Rated IK10, IP65 performance
- Double insulation



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Diameter (mm)	Height (mm)	Trade Price
SE7192TC		18W Round Led Wall/Ceiling Light, IP65	230	18	1600/1800/1750	3000/4000/5700	80	275	60	\$163.20
SE7192TC/EM		18W Vandal Resistant Round Led Wall/ Ceiling Light, IP65. Emergency	230	18	1600/1800/1750	3000/4000/5700	80	275	60	\$309.96

S-FIRE SELK1500SF2 - 4W

NON-MAINTAINED - SELK1500SF2 S-FIRE LED 4W emergency luminaire with adaptor ring

Application: A perfect choice for apartments or commercial spaces requiring compliance to AS/NZS 2293

SPECIFICATIONS

- Compliant to AS/NZS2293, with an impressive D63 emergency lighting classification, non-maintained
- Polycarbonate body profile, double insulation, Ø72mm cut-out & includes a Ø145mm adaptor ring (Max. Ø130mm cut-out)
- 4W system, LED charge status display & test switch, with remote control gear & high performance integral Lithium battery
- 1.2m Flex & 3-pin plug fitted, IC-4 rated (luminaire head only), trim colour white
- Guaranteed 90 minutes emergency function. Intelligent automatic recharging function, 16 hour recharge time & deep discharge protection
- Optional surface mount sheet metal box (only) SELK1500SF2SM/P available, dimensions 220 x 220 x 60mm, colour white.



Code	Cat#	Description	Input Voltage (V/AC)	Power (W)	CCT (K)	CRI	Diameter (mm)	Dim LxWxH (mm)	Trade Price
S-FIRE SELK1500SF2		Non-maintained S-FIRE Emergency	230	4	6000	80	145	220 x 220 x 60	\$117.44



CLEAR DIMM LG5 - 4W

4W Dimmable LED filament GLS style lamps

Application: Energy efficient LED lamp solutions, 4W models

SPECIFICATIONS

- Clear glass diffuser, E27 or BC base
- High efficiency LED filament & colour rendering CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG5-27E27D-C	LG5/27E27D/C	230/50	4	500	2700	80	320°	Φ 60mm, 106mm L	E27	\$9.28



CLEAR DIMM LG9 - 8W

8W Dimmable LED filament GLS style lamps

Application: Energy efficient LED lamp solutions, 8W models

SPECIFICATIONS

- Clear glass diffuser, ES or BC base
- High efficiency LED filament & colour rendering
- Integral trailing edge dimmable LED driver
- 320° Beam angle
- Colour temperature 2700K
- 1:1 Size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG9-27B22D-C	LG9/27B22D/C	8	950	2700	80	320°	Φ 60mm, 105mm L	B22	\$15.73
LG9-27E27D-C	LG9/27E27D/C	8	950	2700	80	320°	Φ 60mm, 105mm L	E27	\$15.73



OPAL DIMM LG9 - 8W

8W dimmable LED filament GLS style lamps

Application: Energy efficient LED lamp solutions, 8W models

SPECIFICATIONS

- Opal polycarbonate diffuser, E27 or BC base
- High efficiency LED filament & colour rendering CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional GLS lamp, dimmable, suits most GLS lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG9-27B22D	LG9/27B22D	8	900	2700	80	320°	Φ 60mm, 105mm L	B22	\$15.73
LG9-27E27D	LG9/27E27D	8	900	2700	80	320°	Φ 60mm, 105mm L	E27	\$15.73



OPAL LGS8TC - 8W

8W LED SMD GLS style opal lamps, with selectable colour temperature

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal polycarbonate diffuser, beam distribution 200°
- Poly covered aluminium body, B22 & E27 lamp bases
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature selectable 2700K/4000K/6000K
- 1:1 size to traditional GLS / A60 lamp, suits most GLS / A60 lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LGS8TC-B22	LGS8TC/B22	8	700/750/700	2700/4000/6000	80	200°	Φ 60mm, 112mm L	B22	\$7.81
LGS8TC-E27	LGS8TC/E27	8	700/750/700	2700/4000/6000	80	200°	Φ 60mm, 112mm L	E27	\$7.81



OPAL LGS10TC - 10W

10W LED SMD GLS style opal lamps, with selectable colour temperature

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal polycarbonate diffuser, beam distribution 200°
- Poly covered aluminium body, B22 & E27 lamp bases
- High efficiency SMD LED chips, CRI >80
- Integral non-dimmable LED driver
- Colour temperature selectable 2700K/4000K/6000K
- 1:1 size to traditional GLS / A60 lamp, suits most GLS / A60 lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LGS10TC-B22	LGS10TC/B22	10	900/1000/950	2700/4000/6000	80	200°	Φ 60mm, 112mm L	B22	\$7.63
LGS10TC-E27	LGS10TC/E27	10	900/1000/950	2700/4000/6000	80	200°	Φ 60mm, 112mm L	E27	\$7.63



OPAL DIMM LGS14D - 14W

12W dimmable LED SMD GLS style opal lamps

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal polycarbonate diffuser, beam distribution 200°
- Poly covered aluminium body, B22 & E27 lamp bases
- High efficiency SMD LED chips, CRI >80
- Integral trailing edge dimmable LED driver
- Colour temperature 2700K/4000K/6000K
- 1:1 size to traditional GLS / A60 lamp, dimmable, suits most GLS / A60 lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LGS14TC-B22	LGS14TC/B22	12	1250/1300/1350	2700/4000/6000	80	200°	Φ 60mm, 112mm L	B22	\$15.54
LGS14TC-E27	LGS14TC/E27	12	1250/1300/1350	2700/4000/6000	80	200°	Φ 60mm, 114mm L	E27	\$15.54

CANDLE LAMPS



CANDLE CLEAR DIM LCA - 4W

4W dimmable LED filament candle style clear lamps

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Clear glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K, CRI >80
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LCA27B15D-C	LCA27B15D/C	4	450	2700	80	320°	Φ 37mm, 95mm L	B15	\$8.36
LCA27B22D-C	LCA27B22D/C	4	450	2700	80	320°	Φ 37mm, 91mm L	B22	\$8.36
LCA27E14D-C	LCA27E14D/C	4	450	2700	80	320°	Φ 37mm, 97mm L	E14	\$8.36
LCA27E27D-C	LCA27E27D/C	4	450	2700	80	320°	Φ 37mm, 92mm L	E27	\$8.36

CANDLE OPAL DIM LCA - 4W

4W dimmable LED filament candle style opal lamps

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament & colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K/5000K
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LCA27B15D	LCA27B15D	4	400	2700	80	320°	Φ 37mm, 95mm L	B15	\$8.36
LCA27B22D	LCA27B22D	4	400	2700	80	320°	Φ 37mm, 91mm L	B22	\$8.36
LCA27E14D	LCA27E14D	4	400	2700	80	320°	Φ 37mm, 97mm L	E14	\$8.36
LCA27E27D	LCA27E27D	4	400	2700	80	320°	Φ 37mm, 92mm L	E27	\$8.36



FANCY ROUND CLEAR DIM LFR - 4W

4W dimmable LED filament fancy round clear style lamps

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Clear glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament & colour rendering CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LFR27B15D-C	LFR27B15D/C	4	450	2700	80	320°	Φ 45mm, 75mm L	B15	\$8.13
LFR27B22D-C	LFR27B22D/C	4	450	2700	80	320°	Φ 45mm, 71mm L	B22	\$8.13
LFR27E14D-C	LFR27E14D/C	4	450	2700	80	320°	Φ 45mm, 77mm L	E14	\$8.13
LFR27E27D-C	LFR27E27D/C	4	450	2700	80	320°	Φ 45mm, 73mm L	E27	\$8.13



FANCY ROUND OPAL DIM LFR - 4W

4W dimmable LED filament fancy round opal style lamps

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal glass diffuser, B15, B22, E14, E27 bases
- High efficiency LED filament & colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional fancy round lamp, dimmable, suits most fancy round lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LFR27B15D	LFR27B15D	4	400	2700	80	320°	Φ 45mm, 75mm L	B15	\$8.13
LFR27B22D	LFR27B22D	4	400	2700	80	320°	Φ 45mm, 71mm L	B22	\$8.13
LFR27E14D	LFR27E14D	4	400	2700	80	320°	Φ 45mm, 77mm L	E14	\$8.13
LFR27E27D	LFR27E27D	4	400	2700	80	320°	Φ 45mm, 73mm L	E27	\$8.13

GU10 / MR16 LAMPS



LED IP65 LPAR38 - 12W

12W PAR38 LED, IP65, E27 lamp base

Application: Perfect for retail & residential spaces

SPECIFICATIONS

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, beam 100°
- Integral non-dimmable LED driver, E27 lamp base
- Selectable colour temperature 3000K/4000K/6000K, CRI >80
- Designed for equivalent IP rated PAR floodlights, installed in under covered eave environments
- Double insulation



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Base Type	Trade Price
LPAR38TC	LPAR38TC	230	12	1500/1700/1500	3000/4000/6000	80	100°	E27	\$21.11



GU10L TC - 4W/6W

High efficiency GU10L TC LED lamps

Application: Energy efficient LED lamp solutions, ideal for residential luminaires

SPECIFICATIONS

- Frosted polycarbonate lens
- Poly covered aluminium body
- High efficiency SMD LED chip, CRI >80
- Integral LED driver, non-dimmable, 230V
- Colour temperature selectable 3000K/4000K/6000K
- Beam distribution 50°, GU10 lamp base



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Base Type	Trade Price
GU10L350TC	GU10L350TC	230	4	360/400/380	3000/4000/6000	80	50°	GU10	\$9.52
GU10L550TC	GU10L550TC	230	6	500/600/550	3000/4000/6000	80	50°	GU10	\$10.16



LED MR16 TC - 4W/6W

Non-dimmable 4W/6W - MR 16 profile shape LED, with selectable colour temperature

Application: Ideal for any residential interior space

SPECIFICATIONS

- Shockproof frosted polycarbonate lens
- Die-cast aluminium body
- High efficiency SMD LED chips
- Recommended driver is the SAL MINI60
- Beam distribution 38°
- Selectable colour temperature 3000K/4000K/6000K, lamp base GU5.3



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Base Type	Trade Price
MR16-5W-TC	MR16/5W/TC	12	4	360/400/380	3000/4000/6000	80	38°	GU5.3	\$10.27
MR16-7W-TC	MR16/7W/TC	12	6	500/600/550	3000/4000/6000	80	38°	GU5.3	\$11.95



LED MR16 DIM - 9W

Dimmable 9W - MR16 profile LED

Application: Residential interior spaces

SPECIFICATIONS

- Shockproof frosted polycarbonate lens
- Die cast aluminium body
- High efficiency SMD LED chips
- The essential driver is the SAL MINI60 & the recommended dimmer is the SAL SDA450U. Dependent upon circuit & load configurations, the addition of a load correction capacitor may be required.
- Beam distribution 60°, CRI >80
- GU5.3 lamp base



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Base Type	Trade Price
MR16DIM9W-WW	MR16DIM9W/WW	12	9	500	3000	80	60°	GU5.3	\$35.4



CLEAR SPHERICAL LG95 - 6W

6W dimmable LED filament clear spherical lamp

Application: Energy efficient LED lamp solutions, B22 or E27 bases

SPECIFICATIONS

- Clear glass diffuser, B22 or E27 bases
- High efficiency LED filament & colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional spherical lamp, dimmable, suits most spherical lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG95-27E27D-C	LG95/27E27D/C	6	750	2700	80	320°	Φ 95mm, 140mm L	E27	\$23.98



CLEAR SPHERICAL LG125 - 8W

8W dimmable LED filament clear spherical lamp

Application: Energy efficient Deco LED lamp solutions, B22 or E27 bases

SPECIFICATIONS

- Clear glass diffuser, B22 or E27 bases
- High efficiency LED filament & colour rendering, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam angle
- Colour temperature 2700K
- 1:1 size to traditional spherical lamp, dimmable, suits most spherical lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG125-27B22D-C	LG125/27B22D/C	8	950	2700	80	320°	Φ 125mm, 173mm L	B22	\$27.91

LG125-27E27D-C	LG125/27E27D/C	8	950	2700	80	320°	Φ 125mm, 173mm L	E27	\$27.91
----------------	----------------	---	-----	------	----	------	------------------	-----	---------

TUBULAR / PILOT LIGHTS



OPAL LG125 DIM - 13W

13W dimmable LED SMD opal spherical lamp

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal polycarbonate diffuser
- Poly covered aluminium body, B22 or E27 lamp bases
- High efficiency SMD LED chips, beam 240°
- Integral trailing edge dimmable LED driver
- Colour temperature 3000K, CRI >80
- 1:1 size to traditional spherical lamp, dimmable, suits most spherical lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LG125-830B22	LG125/830B22	13	1100	3000	80	240°	Φ 120mm, 158mm L	B22	\$32.72
LG125-830E27	LG125/830E27	13	1100	3000	80	240°	Φ 120mm, 158mm L	E27	\$32.72



TUBULAR CLEAR LT25 - 2W

2W LED filament tubular lamp

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Clear glass diffuser, E14 base, 230V
- High efficiency LED filament & colour rendering, CRI >80
- Integral non-dimmable LED driver
- 320° beam angle
- Colour temperature 3000K
- Suitable to replace equivalent incandescent tubular lamp or pilot lamp



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LT25F830E14	LT25F830E14	230	2	200	3000	80	320°	Φ 25mm, 84mm L	E14	\$11.07



PILOT CLEAR LP25 - 1.5W

1.5W LED filament tubular pilot lamp

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Clear glass diffuser, E14 base, 230V
- High efficiency LED filament & colour rendering, CRI >80
- Integral trailing edge non-dimmable LED driver
- 320° beam angle
- Colour temperature 3000K
- Suitable to replace equivalent incandescent tubular lamp or pilot lamps



Code	Cat#	Input Voltage (V/AC)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LP25F830E14-CLEA	LP25F830E14	230	1.5	150	3000	80	320°	Φ 25mm, 58mm L	E14	\$11.07



LT SERIES LT409TC - 9W

9W Dimmable LED SMD tubular lamps, with selectable colour temperature

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Opal polycarbonate diffuser
- Poly covered aluminium body
- High efficiency SMD LED chips, beam 200°
- Integral dimmable LED driver
- Selectable colour temperature 3000K/4000K/6000K, CRI >80
- Suits most CFL lamp fitting, lamp base E27
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LT409TC-E27D	LT409TC/E27D	9	850/900/950	3000/4000/6000	80	200°	Φ 40mm, 107mm L	E27	\$11.83

LED TUBE LT8 TC - 9W/24W

LED shatter-proof tube, G13 base

Application: Energy efficient LED lamp solutions

SPECIFICATIONS

- Fits new T8 LED fixtures or retrofit T8 fluorescent fixtures (Magnetic Ballast)
- Traditional full glass shatter-proof poly coated body construction, G13 lamp base
- High efficiency SMD LED chips, CRI >80, beam 320°
- Integral non-dimmable LED driver, 9W, 18W or 24W models
- Colour temperature selectable 3000K / 4000K / 6000K
- No flicker, instant start, Safety LED fuse included
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Dimensions	Base Type	Trade Price
LT8-60TC	LT8/60TC	9	900/1100/1000	3000/4000/6000	80	320°	Φ 28mm, 589mm L	G13	\$14.28
LT8-120TC	LT8/120TC	18	1800/2200/2000	3000/4000/6000	80	320°	Φ 28mm, 1198mm L	G13	\$16.51
LT8-150TC	LT8/150TC	24	2300/2500/2400	3000/4000/6000	80	320°	Φ 28mm, 1500mm L	G13	\$22.56

LED TUBE G9 - 2.5W

G9 base designed to suit most G9 luminaires

Application: G9L LED lamp, 2.5W ideal for feature lighting

SPECIFICATIONS

- Opal polycarbonate body profile
- High-efficiency SMD LED chips, CRI>80
- 320° optical distribution
- Colour temperature, choice of 3000K/6000K
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Base Type	Trade Price
G9L3D-WW	G9L3D/WW	2.5	200	3000	80	320°	G9	\$9.16
G9L3D-DL	G9L3D-DL	2.5	220	6000	80	320°	G9	\$9.16



R SERIES LR80 - 9W

9W LED directional lamp R lamps

Application: Energy efficient LED lamp solutions, E27 lamp base

SPECIFICATIONS

- Opal polycarbonate diffuser, 120° beam distribution
- Poly covered aluminium body
- High efficiency SMD LED chips
- Integral non-dimmable LED driver
- Colour temperatures 3000K, CRI > 80
- 1:1 size to traditional R lamp, non-dimmable, suits most R lamp fittings
- Double insulation



Code	Cat#	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Height (mm)	Base Type	Trade Price
LR80-WW	LR80/WW	9	850	3000	80	120°	113	E27	\$19.41

CONTACT
SAM SYKES
021 199 0275