



## BUNKER 15 OVAL SENSOR SL7271 - 15W

LED 15 watt surface mount oval shaped bunker, IP54, PIR sensor

### Application

A robust solution for residential and apartment interior or exterior covered eave utility spaces

### Design Specifications

- Durable UV resistant white or black polycarbonate body, opal polycarbonate diffuser
- Integral control gear, 15 watt with PIR sensor control, fixed 30 seconds ON, 7 metres detection distance.
- CRI > 80, 1050lm
- Quick connect installation design
- Robust IK08 protection



### Technical Specification


| Model No.     | Description                           | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | CRI |
|---------------|---------------------------------------|----------------------|-----------|-------------|---------|-----|
| SL7271CW/WH/S | LED BUNKER 15W OVAL IP54 4K WH SENSOR | 240                  | 15        | 1050        | 4000    | 80  |
| SL7271CW/BK/S | LED BUNKER 15W OVAL IP54 4K BK SENSOR | 240                  | 15        | 1050        | 4000    | 80  |

### Technical Specification

| Model No.     | Beam Angle (°) | Body Colour | Dim (mm)                |
|---------------|----------------|-------------|-------------------------|
| SL7271CW/WH/S | 110            | WHITE       | 233(L) x 133(W) x 68(H) |
| SL7271CW/BK/S | 110            | BLACK       | 233(L) x 133(W) x 68(H) |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


## Dimensions

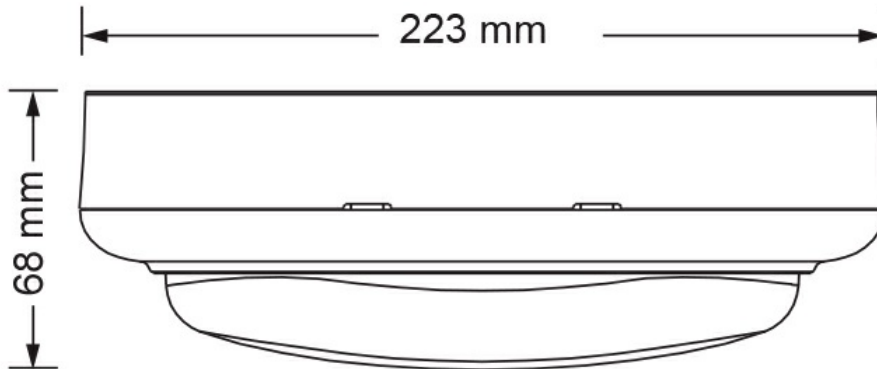

## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

### SL7271CW/WH at 4000K

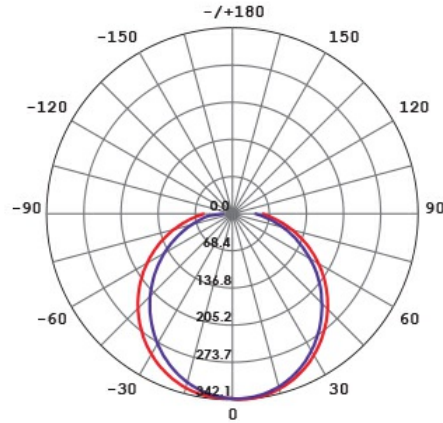



## Product Images

---

